

Your Trusted Partner for Custom Magnetic Solutions

Contact Information

✉ nbrc@nbricheng.com
rc@nbricheng.com
zhang@nbricheng.com

☎ +86-13905744290
+86-15700159510

🌐 www.rcmagnet.com
www.magnetic-link.com

🛒 <https://chen860917.1688.com>



📍 No.12 Wangjiang Road,
Haishu, Ningbo, China

☎ 0574-88193768 88170448

📠 0574-88017740



MAGNETIC TOOLS & MATERIALS

BSCI Certified
Est. 2008



REMARKABLE

CONNECTIVITY

from RICHENG

Professional magnetic solutions provider since 2008 with 18 years of industry expertise



INDUSTRIAL COMMERCIAL
 INTEGRATION
 Factory-to-customer supply
 chain with full-process quality control



CUSTOMIZATION
 Tailored services to meet your
 specific application requirements



CREATIVITY&INNOVATION
 Annual new product development mechanism
 for continuous technological advancement



COST-EFFECTIVENESS
 High-quality magnetic solutions
 at competitive prices

Our Story:


18 Years of

Magnetic

Innovation

Our mission

Our mission is to create innovative-magnetic solutions. We are dedicated to designing products that inspire creativity, enhance organization, and elevate productivity.

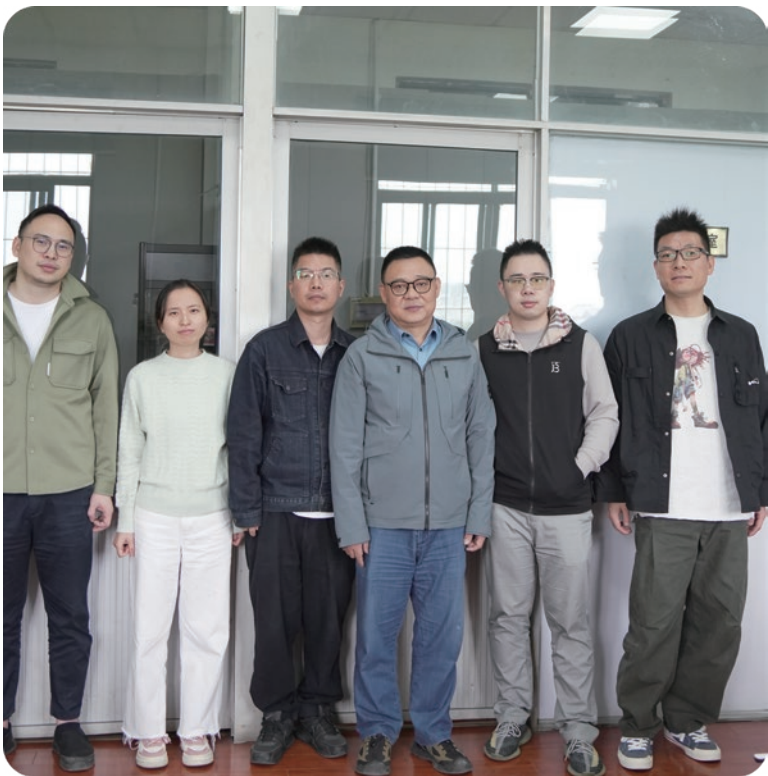

“We don’t just manufacture magnets—we deliver reliable magnetic solutions”

CUSTOMIZE · CONNECT · CREATE

Our Services

- Customization
 Sizes, materials, coatings, magnetism, assemblies
 – fully customizable.
- Fast Prototyping
 3–7 days to validate your design.
- Small Orders & OEM Welcome
 Flexible MOQ for brands, importers and traders.
- Technical Support
 We help you choose the right magnet based on:

 - Working temperature
 - Required force
 - Application environment
 - Installation method



TECHNICAL FOUNDATION



CONTENTS

05 /	magnet (NdFeb/Ferrite/SmCo/AlNiCo) 钕铁硼/铁氧体/钐钴/铝镍钴磁铁
15 /	pot magnet 各类磁吸盘
21 /	fishing magnet 钓鱼/起重磁
24 /	rectangular pot magnet 方形磁吸盘
26 /	rubber coated magnet 包胶磁铁
29 /	anchor magnet 锚固磁铁
31 /	magnetic tool 磁性工具
47 /	magnetic hook 磁性挂钩
51 /	magnetic stationery 磁性文具
57 /	magnetic name badge 磁性胸牌





NDFEB MAGNET


(BH)max from 26 ~ 53 MGOe,
Br 1.04~1.48T, high Hc that not easy
to demagnetize
High coercivity for excellent
demagnetization resistance

HAto HsH


Grade Range :
N35-N55/ M/H/SH /UH /EH
Broad Grade Selection

Versatile


Disc · Ring · Block · Arc · Cylinder ·
Custom
Flexible Shapes & Coatings

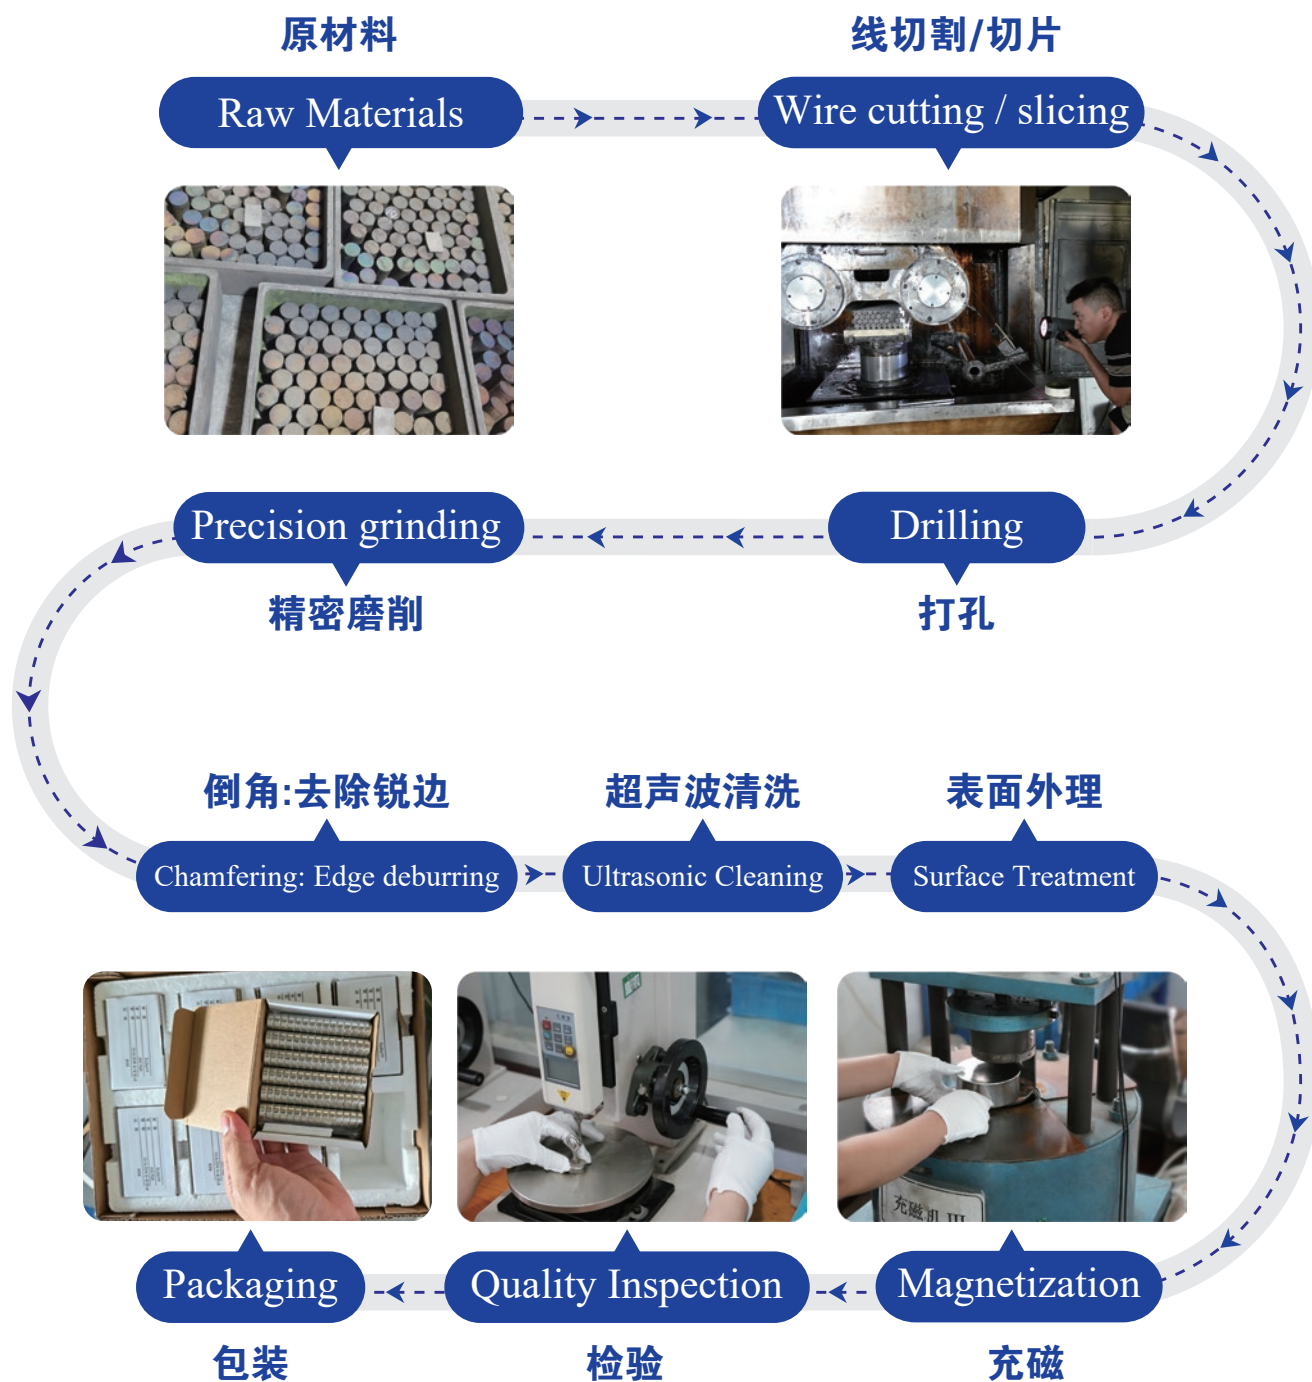

MAGNETIZATION DIRECTION

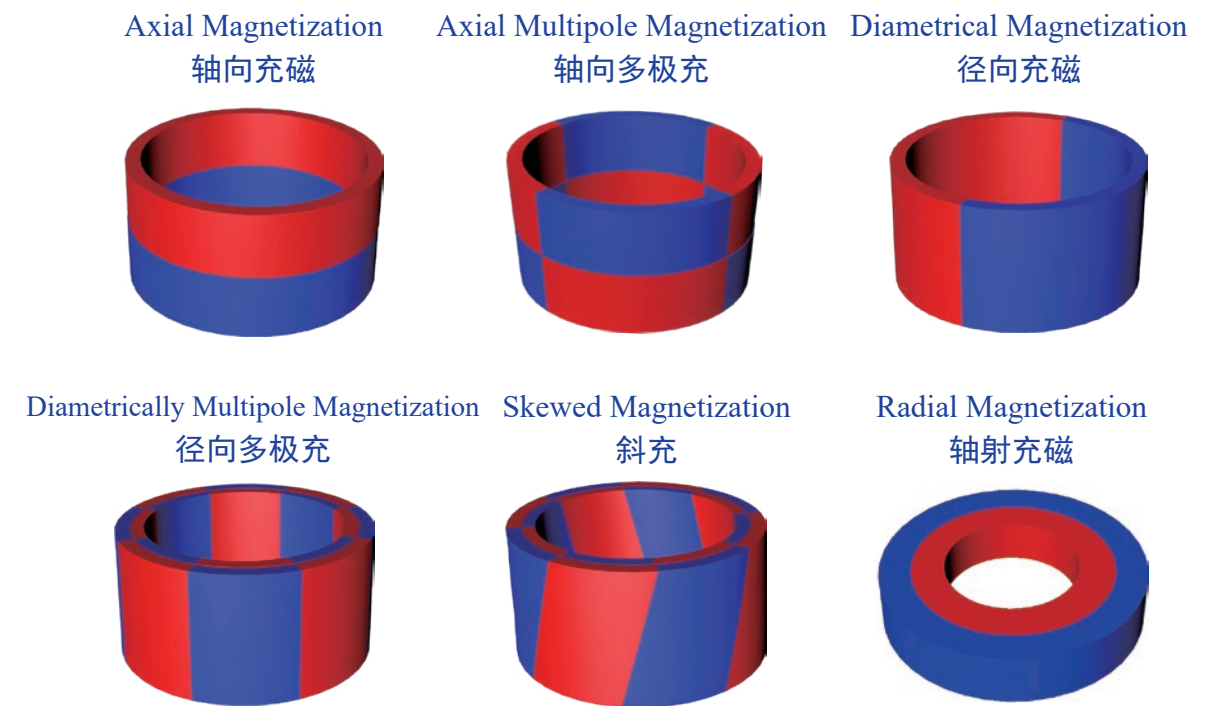


Advantages of Radially Oriented Ring Magnet

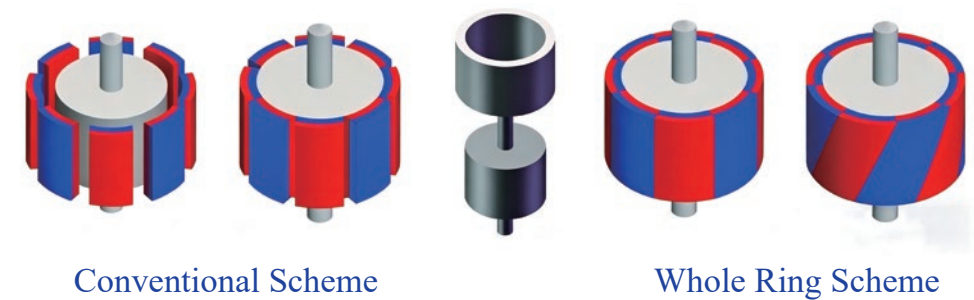

Pot Magnet (Focused Magnetic Circuit)

A pot magnet uses a steel shell to concentrate magnetic flux onto one working face. This focused magnetic circuit greatly increases holding force, ideal for precise positioning and magnetic sensing.

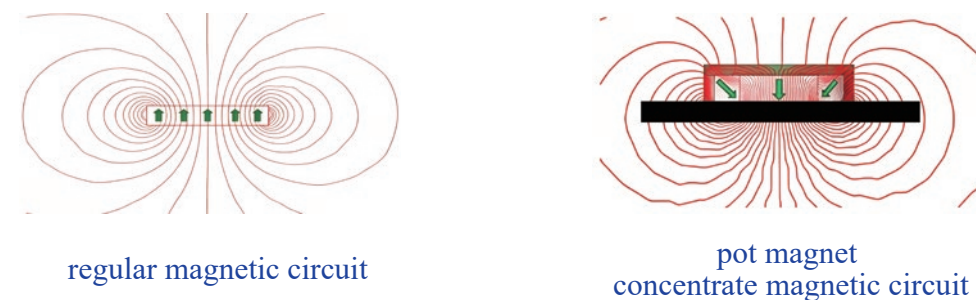

magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌



CUSTOMIZATION SERVICE

We offer full customization of dimensions, material grades, coatings, magnetization and packaging. Our engineering team designs magnetic circuits and solutions based on your application, holding force requirements and component dimensions.

	Material: NdFeB Grade: N52 Shape: Disc Dimensions: Dia. 10 × Thk. 2 mm Magnetization Direction: Through Thickness (axial) Coating: Ni-Cu-Ni (Nickel Plating) Tolerance: ±0.05 mm
	Material: NdFeB Grade: N38SH Shape: Block Dimensions: 20(L) × 10(W) × 3(T) mm Magnetization Direction: Along Length Coating: Epoxy Coating Tolerance: ±0.1 mm
	Material: NdFeB Grade: N45M Shape: Ring Dimensions: OD 15 × ID 5 × Thk. 3 mm Magnetization Direction: Axial (through thickness) Coating: Zinc Plating Tolerance: ±0.05 mm
	Arc Magnet Outer R15 × Inner R10 × 45° × 5 mm
	Please Show Us The Drawing



ONE-STOP INTEGRATED MAGNETIC SOLUTIONS

We specialize in manufacturing magnets assembled with metal, rubber and plastic components, delivering ready-to-use products for your direct assembly.

Orders & Custom Parts Welcome

We supply sintered & bonded NdFeB in all grades and shapes, fully customized to your specifications.

✓ N35-N55/M/H/SH/UH/EH

✓ Custom Shapes

✓ Multiple Coatings

✓ Small Batch&OEM

✓ Drawing-Based Production



Rapid Prototyping Service

Fast Prototyping Service: Rapid and efficient magnet sample to validate your design.
Short lead time: 3–7 days to accelerate product development and ensure stable mass production.

magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌



牌号	剩磁 Br		矫顽力 Hcb		内禀矫顽力 Hcj		最大磁能积 (Bh) max		推荐最高 工作温度TW
	kGs	T	kOe	kA/m	kOe	kA/m	MGOe	kJ/m³	℃
N33	11.3-11.8	1.13-1.18	≥10.5	≥836	≥12	≥955	31-34	247-271	80
N35	11.8-12.3	1.18-1.23	≥10.9	≥868	≥12	≥955	33-36	263-287	80
N38	12.3-12.6	1.23-1.26	≥11.3	≥899	≥12	≥955	36-39	287-311	80
N40	12.6-12.9	1.26-1.29	≥11.4	≥907	≥12	≥955	38-41	302-327	80
N42	12.9-13.3	1.29-1.33	≥11.5	≥915	≥12	≥955	40-43	318-342	80
N45	13.3-13.7	1.33-1.37	≥11.6	≥923	≥12	≥955	43-46	342-366	80
N48	13.7-14.1	1.37-1.41	≥11.6	≥923	≥12	≥955	46-49	366-390	80
N50	14.0-14.5	1.40-1.45	≥10.5	≥836	≥11	≥876	48-51	382-406	80
N52	14.3-14.8	1.43-1.48	≥10.5	≥836	≥11	≥876	50-53	398-422	80
33M	11.3-11.8	1.13-1.18	≥10.5	≥836	≥14	≥1114	31-34	247-271	100
35M	11.8-12.3	1.18-1.23	≥10.9	≥868	≥14	≥1114	34-36	271-287	100
38M	12.3-12.6	1.23-1.26	≥11.3	≥899	≥14	≥1114	36-39	287-311	100
40M	12.6-12.9	1.26-1.29	≥11.6	≥923	≥14	≥1114	38-41	302-327	100
42M	12.9-13.3	1.29-1.33	≥12.0	≥955	≥14	≥1114	40-43	318-342	100
45M	13.3-13.7	1.33-1.37	≥12.5	≥955	≥14	≥1114	43-46	342-366	100
48M	13.7-14.1	1.37-1.41	≥12.9	≥1027	≥14	≥1114	45-49	358-390	100
33H	11.3-11.8	1.13-1.18	≥10.5	≥836	≥17	≥1353	31-34	247-271	120
35H	11.8-12.3	1.18-1.23	≥10.9	≥868	≥17	≥1353	33-36	263-287	120
38H	12.3-12.6	1.23-1.26	≥11.3	≥899	≥17	≥1353	36-39	287-311	120
40H	12.6-12.9	1.26-1.29	≥11.6	≥923	≥17	≥1353	38-41	302-327	120
42H	12.9-13.3	1.29-1.33	≥12.0	≥955	≥17	≥1353	40-43	318-342	120
45H	13.3-13.7	1.33-1.37	≥12.3	≥979	≥17	≥1353	43-46	342-366	120
48H	13.7-14.1	1.37-1.41	≥12.5	≥955	≥17	≥1353	46-49	366-390	120
30SH	10.8-11.4	1.08-1.14	≥10.1	≥804	≥20	≥1592	28-31	223-247	150

牌号	剩磁 Br		矫顽力 Hcb		内禀矫顽力 Hcj		最大磁能积 (Bh) max		推荐最高 工作温度TW
	kGs	T	kOe	kA/m	kOe	kA/m	MGOe	kJ/m³	℃
33SH	11.4-11.8	1.14-1.18	≥10.6	≥844	≥20	≥1592	31-34	247-271	150
35SH	11.8-12.3	1.18-1.23	≥11.0	≥876	≥20	≥1592	33-36	263-287	150
38SH	12.3-12.6	1.23-1.26	≥11.4	≥907	≥20	≥1592	36-39	287-311	150
40SH	12.6-12.9	1.26-1.29	≥11.6	≥939	≥20	≥1592	38-41	302-326	150
42SH	12.9-13.3	1.29-1.33	≥12.4	≥987	≥20	≥1592	40-43	318-342	150
45SH	13.3-13.7	1.33-13.7	≥12.6	≥1003	≥20	≥1592	42-46	334-366	150
28UH	10.4-10.8	1.04-1.08	≥9.6	≥764	≥25	≥1989	26-29	207-231	180
30UH	10.8-11.4	1.08-1.14	≥10.1	≥804	≥25	≥1989	28-31	223-247	180
33UH	11.4-11.8	1.14-1.18	≥10.7	≥852	≥25	≥1989	31-34	247-271	180
35UH	11.8-12.3	1.18-1.23	≥10.8	≥860	≥25	≥1989	33-36	263-287	180
38UH	12.3-12.6	1.23-1.26	≥11.0	≥876	≥25	≥1989	36-39	287-311	180
40UH	12.5-12.9	1.25-1.29	≥11.3	≥899	≥25	≥1989	38-41	302-326	180
28EH	10.4-10.8	1.04-1.08	≥9.8	≥780	≥30	≥2388	26-29	207-231	200
30EH	10.8-11.4	1.08-1.14	≥10.1	≥804	≥30	≥2388	28-31	223-247	200
33EH	11.4-11.8	1.14-1.18	≥10.3	≥820	≥30	≥2388	31-34	247-271	200
35EH	11.7-12.3	1.17-1.23	≥10.5	≥836	≥30	≥2388	33-36	263-287	200
38EH	12.2-12.6	1.22-1.26	≥11.3	≥899	≥30	≥2388	35-39	278-311	200
28AH	10.4-10.9	1.04-1.09	≥9.8	≥780	≥33	≥2624	26-29	207-231	230
30AH	10.8-11.3	1.08-1.13	≥10.1	≥804	≥33	≥2624	28-31	223-247	230
33AH	11.3-11.8	1.13-1.18	≥10.3	≥820	≥33	≥2624	31-34	247-271	230
35AH	11.8-12.3	1.18-1.23	≥10.5	≥836	≥33	≥2624	33-36	263-287	230

- NDFEB MAGNET
- magnet
各类磁铁
- pot magnet
各类磁吸盘
- fishing magnet
钓鱼/起重磁
- rectangular
pot magnet
方形磁吸盘
- rubber coated
magnet
包胶磁铁
- anchor magnet
锚固磁铁
- magnetic tool
磁性工具
- magnetic hook
磁性挂钩
- magnetic
stationery
磁性文具
- magnetic
name badge
磁性胸牌



FERRITE PERMANENT MAGNETS

Lowest
Cost per Unit — Most Economical Choice


Exceptional Cost Efficiency
No rare earth elements. Lowest raw material cost among all permanent magnets — ideal for high-volume production.

250°C
Max Working Temperature

Good Thermal Stability
Operates up to 250°C. Curie temp ~450°C. Performs reliably in moderate-to-high temperature environments.

No Rust
Bare Use · No Coating Required

Excellent Corrosion Resistance
Inherently rust-proof, no coating required. Suitable for wet, outdoor and high-volume applications.

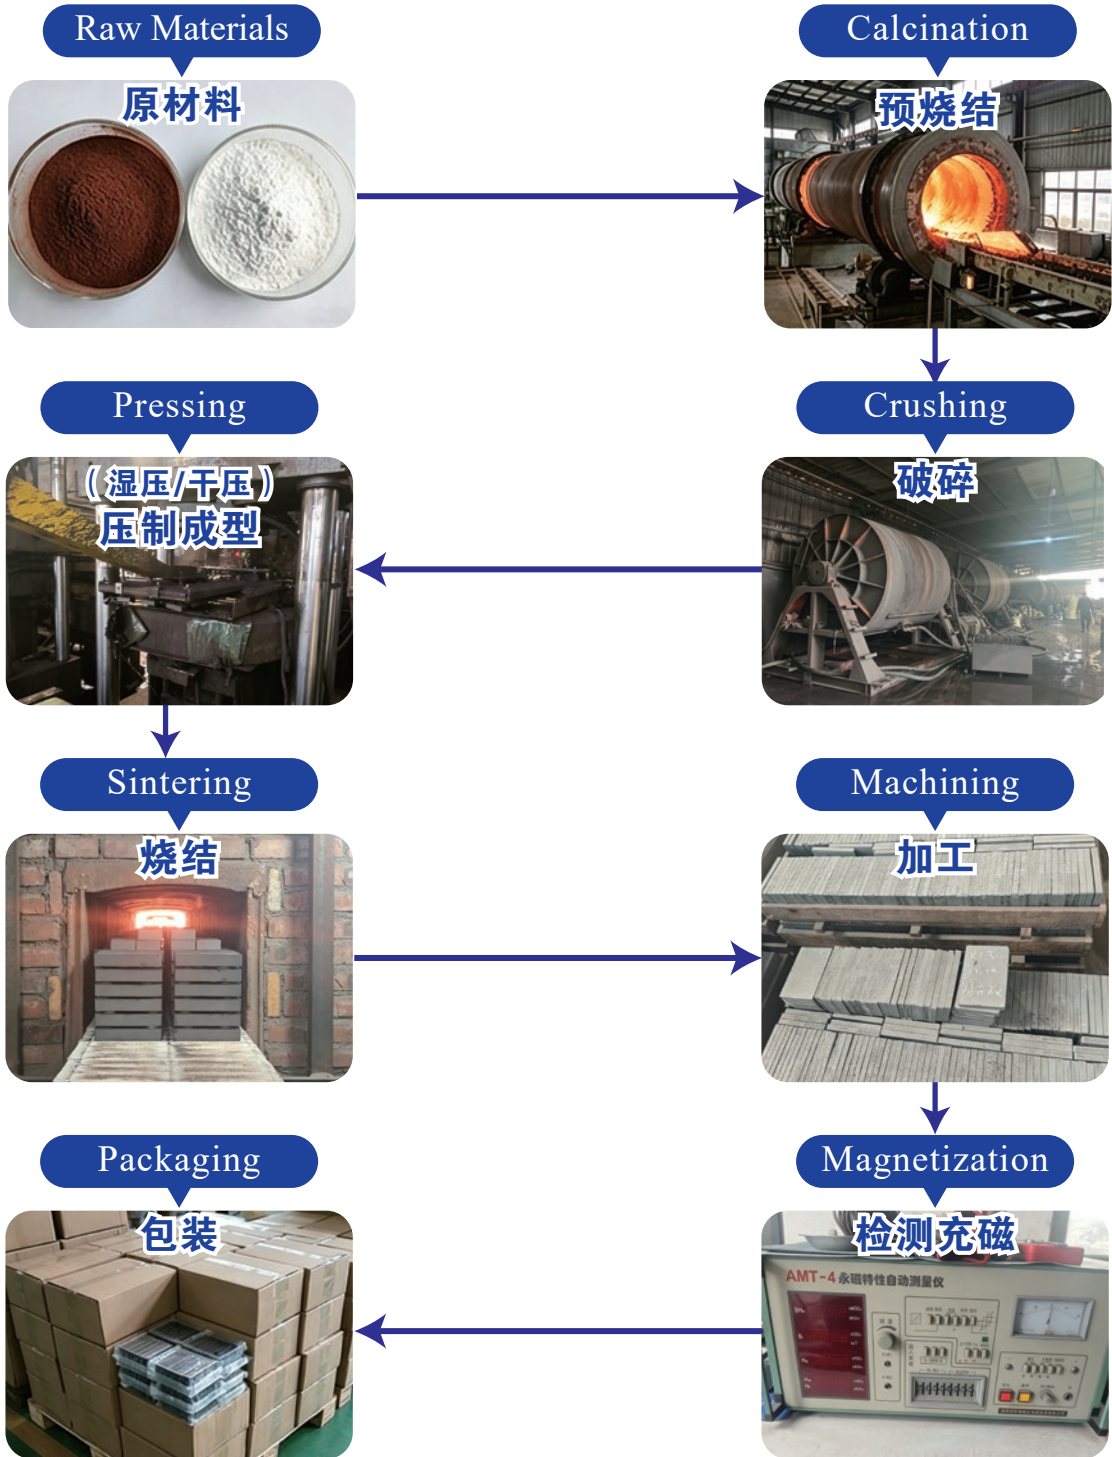

CHINESE STANDARD

Material	剩磁 Br		矫顽力 Hcb		内禀矫顽力 Hcj		最大磁能积 (Bh) max	
	mT	KG	kA/m	Oe	kA/m	Oe	kJ/m ³	MGOe
Y28	370-400	3.7-4.0	175-210	≥2200	180-220	≥2260	26.0-30.0	≥3.3
Y28H-1	380-400	3.8-4.0	240-260	≥3020	250-280	≥3140	27.0-30.0	≥3.1
Y28H-2	360-380	3.3-3.8	271-295	≥3400	382-405	≥1800	26.0-30.0	≥3.3
Y30	370-400	3.7-4.0	175-210	≥3000	180-220	≥2260	26.0-30.0	≥3.3
Y30BH	380-390	3.8-3.9	223-235	≥2200	231-245	≥2900	27.0-30.0	≥3.4
Y30H-1	380-400	3.8-4.0	230-275	≥2890	235-290	≥2950	27.0-32.5	≥3.4
Y30H-2	395-415	3.95-4.15	275-300	≥3460	310-335	≥3900	27.0-32.0	≥3.4
Y32	400-420	4.0-4.2	160-190	≥2010	165-195	≥2070	30.0-33.5	≥3.8
Y32H-1	400-420	4.0-4.2	190-230	≥2390	230-250	≥2890	34.5-35.0	≥4.0
Y32H-2	400-440	4.0-4.4	224-240	≥2810	230-250	≥2890	31.0-34.0	≥3.9
Y33	410-430	4.1-4.3	220-250	≥2760	225-255	≥2830	31.5-35.0	≥4.0
Y33H	410-430	4.1-4.3	250-270	≥3140	250-275	≥3140	31.5-35.0	≥4.0
Y34	420-440	4.2-4.4	200-230	≥2510	205-235	≥2580	32.5-36.0	≥4.1
Y35	430-450	4.3-4.5	215-239	≥2700	217-242	≥2730	33.1-33.2	≥4.2
Y35	430-450	4.3-4.5	215-239	≥2700	217-242	≥2730	33.1-33.2	≥4.2
Y36	440-450	4.3-4.5	247-271	≥3100	250-374	≥4400	35.1-38.3	≥4.4
Y38	440-460	4.4-4.6	285-305	≥3580	294-310	≥3690	36.6-40.6	≥4.6

USA STANDARD

Material	剩磁 Br		矫顽力 Hcb		内禀矫顽力 Hcj		最大磁能积 (Bh) max	
	mT	KG	kA/m	KOe	kA/m	KOe	kJ/m ³	MGOe
C1	230	2.3	148	1.86	258	3.5	8.36	1.05
C5	380	3.8	191	2.4	199	2.5	27	3.4
C7	340	3.4	258	3.23	318	4	21.9	2.75
C8(=C8A)	385	3.85	235	2.95	242	3.05	27.8	3.5
C8B	420	4.2	232	2.913	236	2.96	32.8	4.12
C9	380	3.8	280	3.516	320	4.01	26.4	3.32
C10	400	4	288	3.617	280	3.51	30.4	3.82
C11	430	4.3	200	2.512	204	2.56	34.4	4.32

magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌




SmCo PERMANENT MAGNETS

Samarium Cobalt — High Performance in Heat, Corrosion & Demagnetization Resistance

- SmCo5 — High Coercivity · Simpler Composition
- Sm₂Co₁₇ — Higher Energy Product · Better Temp Stability

350°C Max Working Temperature Excellent High-Temp Performance Curie temp up to 800°C. Stable operation up to 350°C — far superior to NdFeB (~150°C).	32MGOe Max Energy Product (BH)max High Magnetic Strength Energy product up to 32 MGOe (Sm ₂ Co ₁₇). Strong field in compact size — ideal for miniaturized devices.	No Coating Bare Use · Naturally Corrosion Resistant Superior Corrosion Resistance Excellent oxidation resistance. No surface plating required — suitable for harsh chemical and marine environments.
--	---	--

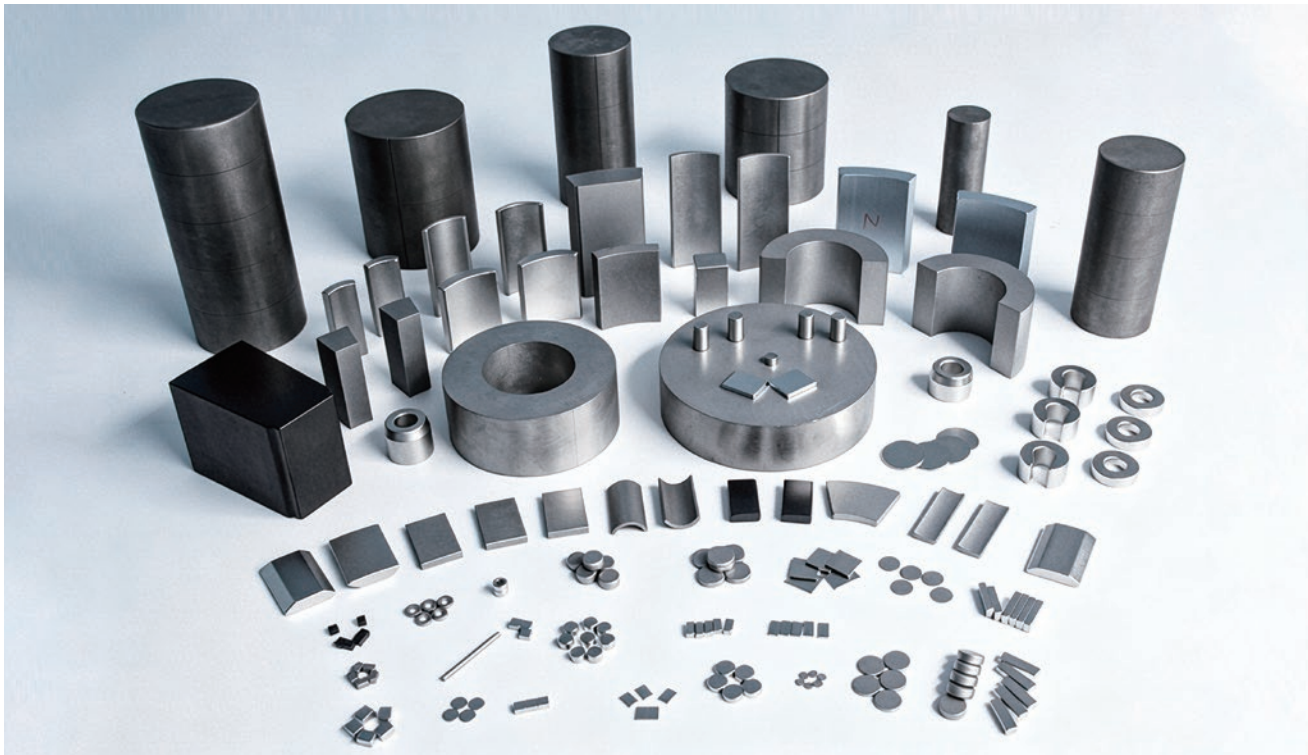

LIMITATIONS TO CONSIDER

- High Material Cost Rare Earth
Samarium & Cobalt are costly — higher unit price than NdFeB or AlNiCo
- Brittle & Fragile
Hard and brittle — prone to chipping; handle and machine with care
- Complex Manufacturing Sintered Only
Produced by sintering only; complex shapes require precision machining

WHEN TO CHOOSE SMCO

- Operating temp 150–350°C with strong field required
- Compact, lightweight design needing high energy density
- Corrosive or marine environment — no coating preferred

AlNiCo PERMANENT MAGNETS

Reliable Magnetic Solution for Extreme High-Temperature Environments

- Cast Process — Large Size & Complex Shapes
- Sintered Process — Small Size & High Precision

890°C Curie Temperature Extreme Temp Stability Working range 400–550°C (up to 600°C+). Far exceeds NdFeB (~460°C) & SmCo (~800°C).	–0.02%/°C Br Temp Coefficient Ultra-Low Temp Coefficient Only 1/5 of NdFeB (–0.11%/°C). Minimal flux variation — ideal for precision sensors.	No Coating Bare Use · No Plating Needed Corrosion Resistant Withstands high-temp, high-humidity & chemical environments without surface treatment.
--	---	--



LIMITATIONS TO CONSIDER

- Low Coercivity H_c < 160 kA/m
Easily demagnetized — must use in closed magnetic circuits
- Low Mechanical Strength
Hard & brittle — sensitive to shock and vibration
- Lower Energy Product Lower (BH)max
Larger volume required vs. rare-earth magnets

WHEN TO CHOOSE AlNiCo

- Continuous operating temp > 350°C
- Highly stable magnetic field vs. temperature required
- Corrosive environment — no surface coating allowed

magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌



POT MAGNET (CUSTOMIZATION ACCEPTED)

Pot Magnet is assembled with neodymium magnet encapsulated in low-carbon steel shell. The closed magnetic circuit greatly enhances holding force, much stronger than bare magnets. The steel body protects the magnet from mechanical damage, and plating treatment provides good rust and corrosion resistance, ideal for industrial fixing and positioning.

POT MAGNET TYPE	INSTALLATION METHOD	KEY FEATURES	TYPICAL APPLICATIONS
Countersunk Type	Fixed via countersunk holes	Easy installation; screws sit flush with working surface	Jigs & fixtures, display stand fixing
Through-Hole Type	Fixed with bolts through through-holes	Secure fixation, suitable for heavy-load applications	Industrial lifting, heavy-duty fixtures
Internal Threa Type	Bolts screwed into internal threaded holes	Flexible installation and quick release	Automation equipment, robot end-of-arm tooling
External Thread Type	Studs directly screwed into mounting holes	Compact structure, low profile, easy installation	Sensor fixing, door catch components

Customization Services

We offer OEM/ODM customization for special applications:

Size & Force: Diameter 10–136 mm, pulling force up to 1000 kg+

Corrosion Resistance: Standard Zn/Ni plating; optional epoxy, Teflon, rubber coating for marine/chemical use


High Temp: Standard 80°C; upgrade to 150°C/200°C NdFeB, SmCo or AlNiCo

Threads: Metric (M3–M16) & imperial custom available

Contact our sales team for drawings, test data or samples.

Pot Magnet With Countersunk Hole


Pot magnets can be customized with American or European standard countersink options. We offer full customization service and support fast custom sample development to meet your specific requirements.

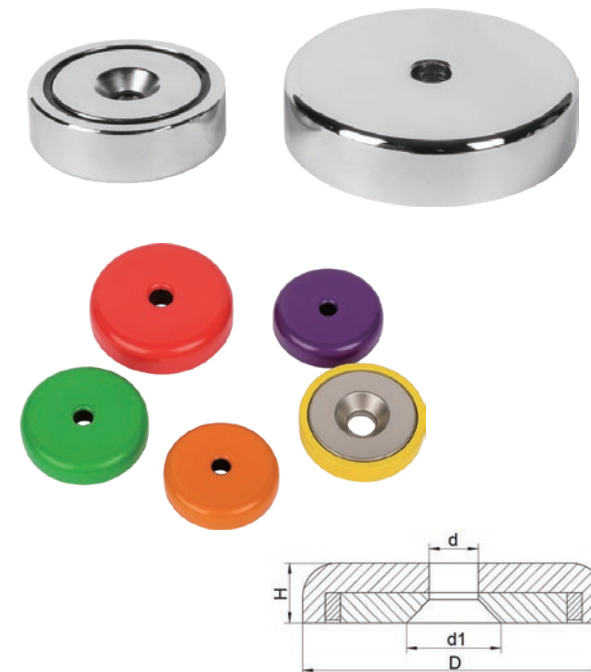

型号 Mode	D (mm)	d (mm)	d1 (mm)	H (mm)	重量 Weight (g)	吸力 Pull Force (kg)
A10	10	3.5	6	4.5	3	1-2
A12	12	3.5	6	4.5	4	2-3
A16	16	3.5	6	5	5.5	6-8
A20	20	4.5	8.3	7	12	11-15
A25	25	5.5	10	8	21	20-25
A32	32	5.5	10	8	37	35-40
A36	36	5.5	10	8	45	40-50
A42	42	6.3	12	9	72	60-75
A48	48	8.3	17	11.5	125	85-100
A60	60	8.3	17	15	250	120-150
A75	75	10.3	18	18	465	220-250
A90	90	11.5	20	18	860	280-360

Pot Magnet With Straight Hole

This pot magnet has a straight hole suitable for some Straight components or strips. This series gives you many choices in various situations. The pot also supports customization and can adjust size and pull force.

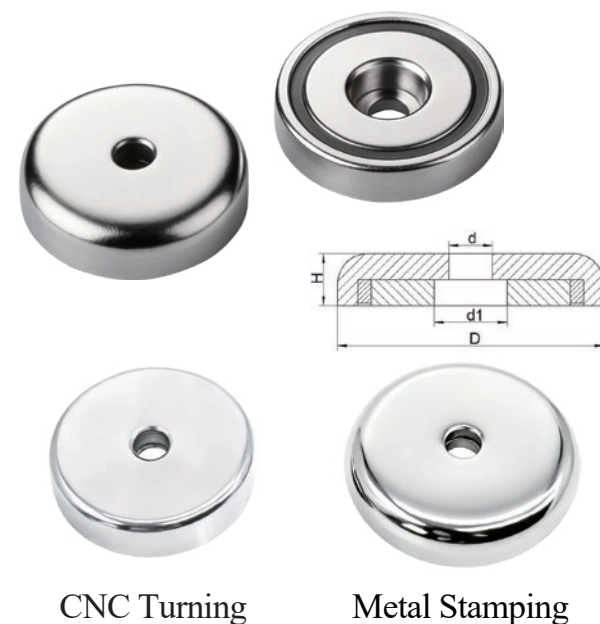

型号 Mode	D (mm)	d (mm)	d1 (mm)	H (mm)	重量 Weight (g)	吸力 Pull Force (kg)
B10	10	3.5	5	4.5	3	1-2
B12	12	3.5	5	4.5	4	2-3
B16	16	3.5	6	5	5.5	6-8
B20	20	4.5	8.3	7	12	11-15
B25	25	5.5	10	8	21	20-25
B32	32	5.5	10	8	37	35-40
B36	36	5.5	10	8	45	40-50
B42	42	6.3	12	9	72	60-75
B48	48	8.3	17	11.5	125	85-100
B60	60	8.3	17	15	250	120-150
B75	75	10.3	18	18	465	220-250
B90	90	11.5	20	18	860	280-360

CNC Turning

Metal Stamping



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩


magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌



Pot Magnet With External Thread

With External thread on the shell, the pot is very easily stalled on the components. Don't worry the magnet would fall out due to its strong pull force, We apply Strong anaerobic adhesive and excellent dimensional accuracy control.

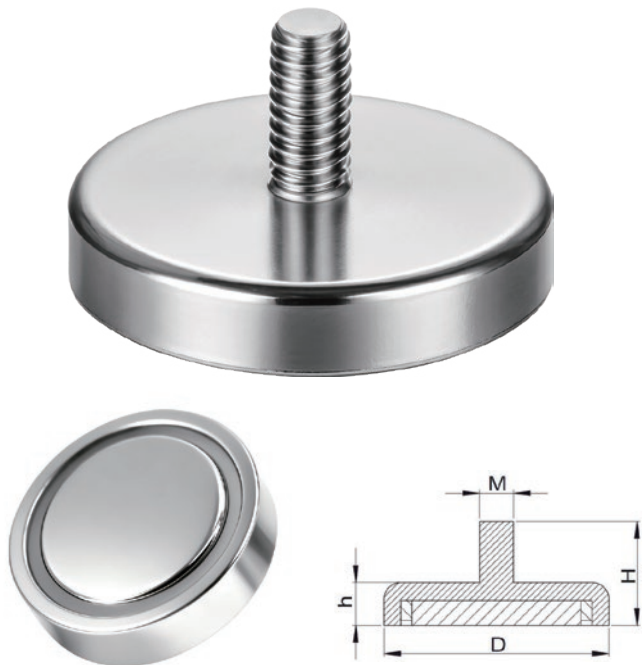

型号 Mode	D (mm)	M	H (mm)	h (mm)	重量 Weight (g)	吸力 Pull Force (kg)
C10	10	3	12	4.5	2.8	1-2
C12	12	3	12	4.5	3.5	2-3
C16	16	4	14.5	5	7	6-8
C20	20	4	17	7	14	11-15
C25	25	5	17	8	25	20-25
C32	32	6	18	8	40	35-40
C36	36	6	22	8	50	40-50
C42	42	6	23	9	80	60-75
C48	48	8	24	11.5	140	85-100
C60	60	8	30	15	260	120-150
C75	75	10	32	18	475	220-250
C90	90	10	35	18	870	280-360

Pot Magnet With Internal Thread

This is highly similar to external series, but this time we used the internal thread to suit custom's requirements.



型号 Mode	D (mm)	d (mm)	M	H (mm)	h (mm)	重量 Weight (g)	吸力 Pull Force (kg)
D10	10	5	3	12	4.5	2.8	1-2
D12	12	5	3	12	4.5	3.5	2-3
D16	16	6	4	12.5	5	6.6	6-8
D20	20	8	4	15	7	15.5	11-15
D25	25	8	5	15	8	25.4	20-25
D32	32	10	6	18	8	42	35-40
D36	36	10	6	18	8	52	40-50
D42	42	10	6	20	9	78	60-75
D48	48	12	8	23	11.5	140	85-100
D60	60	14	8	30	15	260	120-150
D75	75	14	10	32	18	475	220-250
D90	90	14	10	35	18	880	280-360

Pot Magnet With Thread Inside


Sometimes we need to hide the screw or connection part of the pot, in this situation, we can use the AD series. The AD series has a pull force from 0.5kg 230kg.



型号 Mode	D (mm)	H (mm)	M	重量 Weight (g)	吸力 Pull Force (kg)
AD6	6	10	3	2.2	0.5
AD8	8	15	3	5.8	0.8
AD10	10	15	3	9.2	1-1.5
AD12	12	15	5	12.8	1-2
AD15	15	15	5	20.6	2-3
AD18	18	10	6	20	8-10
AD20	20	15	5	35	10-13
AD25	25	25	6	92	13-15
AD30	30	25	6	130	28
AD32	32	15	6	91	34
AD40	40	15	8	140	36
AD50	50	25	8	380	60
AD60	60	20	8	440	120
AD80	80	20	8	783	230

Stepped Pot Magnet

This magnetic push pin is metal designed with the pull fore from 1kg to 28kg. It has a bump that could help people to catch and remove the pin. Hold the thick paper on the blackboard by it! If your push pin couldn't hold the documents, try this!

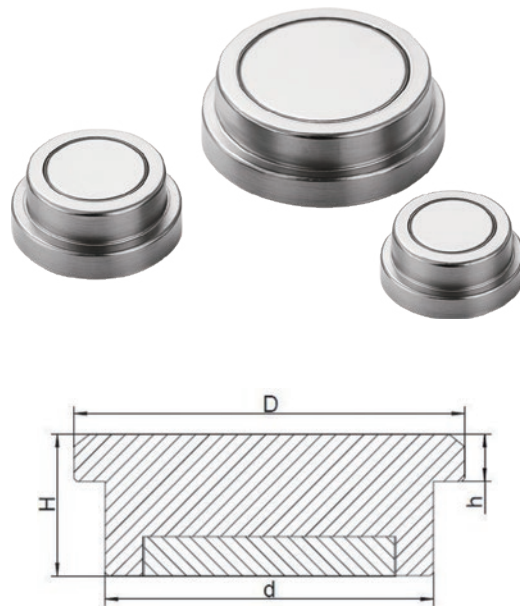

型号 Mode	D (mm)	d (mm)	h (mm)	H (mm)	重量 Weight (g)	吸力 Pull Force (kg)
TXP-12	12	10	4	7	8	1
TXP-16	16	13.5	4	7	10	2.5
TXP-18	18	16	3	5	8	7.5
TXP-22	22	18	6	9	21.8	11
TXP-25	25	21	6	9	30	15
TXP-30	30	27	6	9	47	28



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具


magnetic hook
磁性挂钩

magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌



Ferrite Pot Magnet With Straight Hole

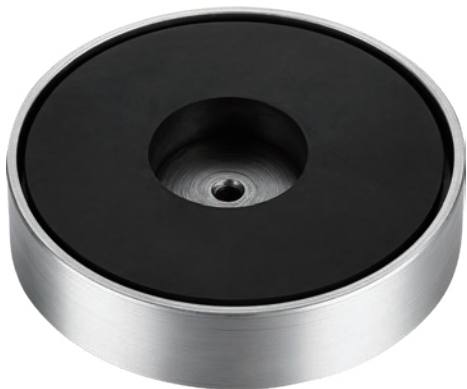

型号 Mode	D (mm)	d (mm)	H (mm)	重量 Weight (g)	吸力 Pull Force (kg)
FB16	16	4.5	4.5	6	1.5
FB20	20	4.5	6	11	2
FB25	25	5.5	7	20	3
FB32	32	5.5	7	31	7
FB36	36	5.5	7.5	42	9
FB40	40	6.5	8	57	11
FB47	47	6.5	9	86	16
FB50	50	6.5	10	111	20
FB57	57	6.5	10.5	153	25
FB63	63	6.5	14	245	32
FB80	80	10.5	18	477	55
FB100	100	12.5	22	956	85
FB125	125	14.5	26	1720	120

Ferrite Pot Magnet With Internal Thread


Ferrite magnet is very common in our magnetic link area, it is cheap and has High-temperature resistance performance compared with NdFeB magnet. The pull force is from 1.5kg to 120kg, while the size of the pot is from 16mm to 125mm.



型号 Mode	D (mm)	H (mm)	L (mm)	M	重量 Weight (g)	吸力 Pull Force (kg)
FD16	16	4.5	11.5	4	6	1.8
FD20	20	6	13	4	11	3
FD25	25	7	15	5	20	4
FD32	32	7	15	6	31	8
FD36	36	7.5	16	6	42	10
FD40	40	8	16.5	6	57	12.5
FD47	47	9	17	6	86	18
FD50	50	10	22	6	111	22
FD57	57	10.5	22	6	153	28
FD63	63	14	26	6	245	35
FD80	80	18	28.5	6	477	60
FD80	80	18	34	10	499	60
FD100	100	22	43	12	956	90
FD125	125	26	50	14	1720	130

BRASS POT MAGNET

The pull force is from 1kg to 75kg, while the size of the pot is from 16mm to 125mm.BRASS POT MAGNET(CAD)The shell of the brass pot, of course, is made of brass. The conductivity is 15–30 MS/m with good Material strength. It is suitable for scenarios that require corrosion resistance, ease of processing, and low conductivity requirements.

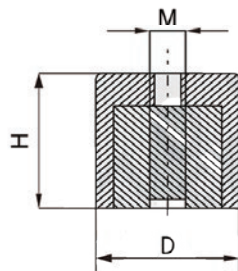

型号 Mode	D (mm)	H (mm)	M	重量 Weight (g)	吸力 Pull Force (kg)
CAD-06	6	20	3	4	1
CAD-08	8	15	3	6	2.5
CAD-10	10	20	4	12	4.5
CAD-13	13	20	4	20	7.5
CAD-15	15	20	4	27	15
CAD-20	20	25	6	59	25
CAD-22	22	25	6	111	28
CAD-25	25	30	6	111	46
CAD-32	32	40	6	243	75

CUSTOMIZATION



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩


magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌




FISHING MAGNET

Made from high-quality NdFeB, this powerful lifting magnet provides strong pulling force to retrieve lost items tools and large objects underwater. Ideal for magnet fishing, industrial lifting, DIY projects, construction and waterway cleanup.

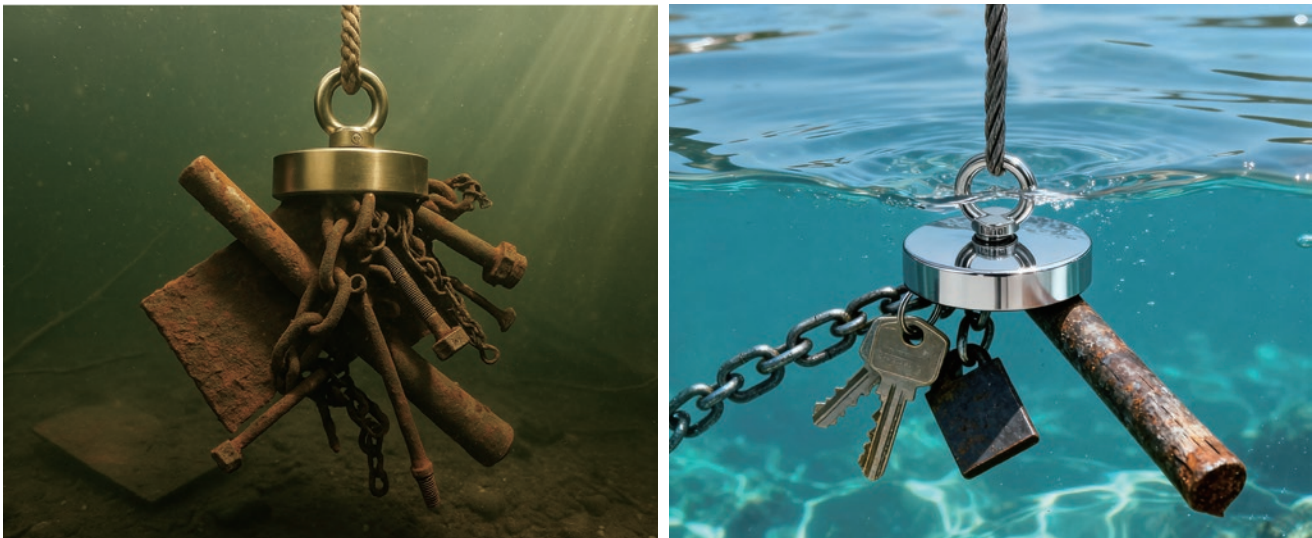

FISHING MAGNET


The EA series apply the eye-nut on the pot magnet.

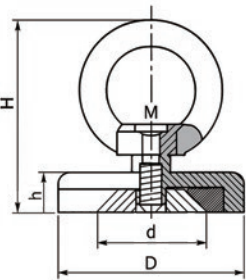

型号 Mode	D (mm)	d (mm)	h (mm)	M	H (mm)	重量 Weight (g)	吸力 Pull Force (kg)
EA25	25	10.5	8	5	33	21	16
EA32	32	10.5	8	6	33	37	33
EA36	36	10.5	8	6	38	45	40
EA42	42	12	9	6	40	72	75
EA48	48	18	11.5	8	49	125	90
EA60	60	18	15	8	54	250	130
EA75	75	19	18	10	66	465	250
EA90	90	22.5	18	12	68	1150	350
EA120	120	22.5	20	12	75	1760	550
EA136	136	28	20	12	75	2330	600



Safety Notes: Strong magnets; keep away from pacemakers, electronic devices and children. Magnets are brittle; avoid dropping or impact. Use magnetic shielding for transportation.



型号 Mode	D (mm)	H (mm)	M	重量 Weight (g)	吸力 Pull Force (kg)
F48-1	48	11	8	160	100
F60-1	60	15	8	330	150
F75-1	75	18	10	650	250
F94-1	94	18	10	1100	350
F116-1	116	20	10	1650	550
F136-1	136	20	12	2300	600



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩


magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌




FISHING MAGNET

The F series fishing magnet has a different Magnetic attraction method to suit all kinds of pick-up requirements. The fishing magnet owns that great power, which could even help people to fish the bicycle in the river, and collect the coins or any precious metal treasure. Also, it will suit for various industry needs, like fixed the equipments, testing tools or so on.

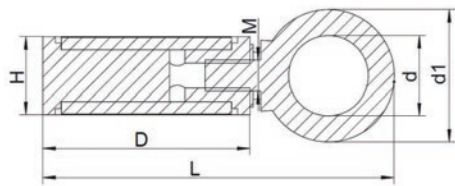

型号 Mode	D (mm)	H (mm)	M	重量 Weight (g)	吸力 Pull Force (kg)
F48-2	48	18	8	290	85
F60-2	60	22	8	450	120
F67-2	67	25	8	680	140
F75-2	75	25	10	860	220
F94-2	94	28	10	1510	320
F116-2	116	32	10	2600	500
F136-2	136	34	12	3850	580

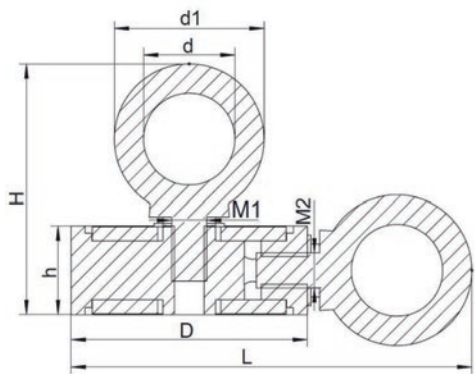


型号 Mode	D (mm)	h (mm)	M	重量 Weight (g)	吸力 Pull Force (kg)
F48-3	48	24	8	340	100
F60-3	60	24	8	550	150
F75-3	75	25	10	1000	250
F94-3	94	28	10	1550	370
F116-3	116	30	10	2350	540
F136-3	136	30	12	3600	600




RECTANGULAR POT MAGNET

Square magnetic suction cup with customizable single-hole, double-hole or Hole-free design. Size and magnetic force fully customizable; maximum holding capacity up to 40 kg. Secure mounting via holes; ideal for equipment fixing, door/window locks, kitchen and office organization.

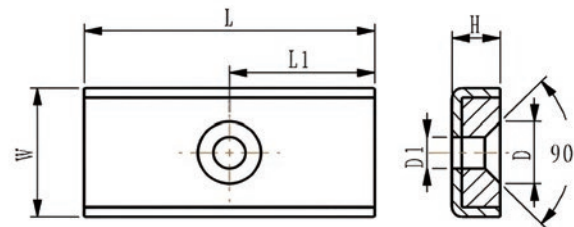

型号 Mode	L (mm)	L1 (mm)	W (mm)	H (mm)	D1 (mm)	D (mm)
RA-1-10	10	5	13.5	5	3.5	6.5
RA-1-15	15	7.5	13.5	5	3.5	6.5
RA-1-20	20	10	13.5	5	3.5	6.5
RA-1-25	25	12.5	13.5	4.7	3.5	6.5
RA-1-25.4	25.4	12.7	15	4.8	3.25	6.5
RA-1-30	30	15	13.5	5	3.5	6.5
RA-1-40	40	20	20	4	4.5	9.5

尺寸可以定制
SIZE CAN BE CUSTOMIZED

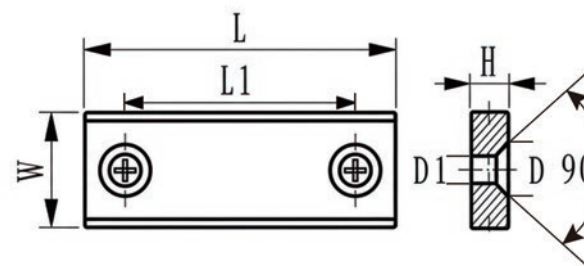

型号 Mode	L (mm)	L1 (mm)	W (mm)	H (mm)	D1 (mm)	D (mm)	重量 Weight (g)	吸力 Pull Force (kg)
RA-2-40	40	30	13.5	5	3.5	6.5	17.3	19
RA-2-50	50	40	13.5	5	3.5	6.5	22.3	27
RA-2-60	60	50	13.5	5	3.5	6.5	28	30
RA-2-70	70	60	13.5	5	3.5	6.5	35	32
RA-2-80	80	70	13.5	5	3.5	6.5	38	33
RA-2-90	90	80	13.5	5	3.5	6.5	45	34
RA-2-100	100	90	13.5	5	3.5	6.5	53	36
RA-2-110	110	100	13.5	5	3.5	6.5	59	38
RA-2-120	120	110	13.5	5	3.5	6.5	62	40

尺寸可以定制
SIZE CAN BE CUSTOMIZED



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌



GUN MAGNET SERIES(GM)

The gun magnet is easy to install. It is a small power magnet that could be installed in your home or office, helps you to take the gun quickly, and protects you. The mag power of them is good enough to hold any handgun.well, also you can use it to fix other metal tool or objection.



型号 Mode	尺寸 Size(mm)	重量 Weight(g)
GM-1	L64*20.5*10	70

型号 Mode	尺寸 Size(mm)	重量 Weight(g)
GM-2	L75*20*5	35


型号 Mode	尺寸 Size(mm)	重量 Weight(g)
GM-3	L95*35*8	107

CUSTOMIZATION



RUBBER COATED MAGNET

Rubber-coated magnets feature excellent durability and a smooth, skin-friendly touch.The soft rubber coating protects against moisture, chemicals and corrosion, ensuring longer service life.Custom colors, logos and patterns are available.Suitable for indoor, outdoor, humid and harsh environments.Available with internal thread, external thread and flat configurations; holding force 4-42 kg.

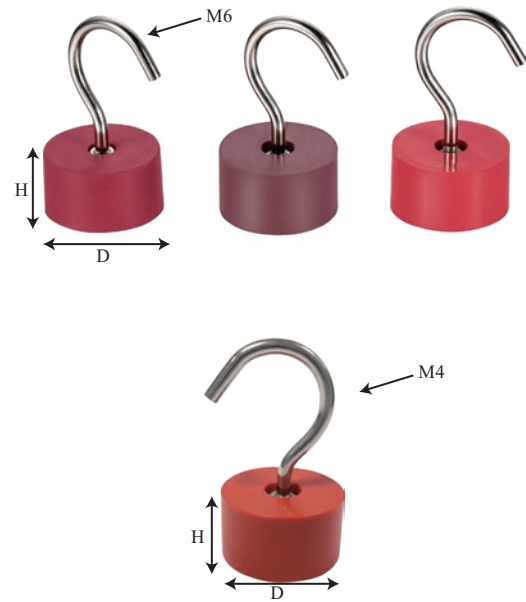

型号 Mode	材质 Material	尺寸 Size(mm)	吸力 Pull Force(kg)	重量 Weight(g)
RC6101-1	silica gel	D45*H25-M6	50~60	215
RC6101-2	natural rubber	D45*H24-M6	50~60	215
RC6101-3	rubber jacket	D45*H24-M6	50~60	215

型号 Mode	材质 Material	尺寸 Size(mm)	吸力 Pull Force(kg)	重量 Weight(g)
RC6309	natural rubber	D36*H21-M6	30~35	130



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩


magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌




Rubber-coated magnets offer versatile threading options, including internal thread, external thread, and flat thread configurations to meet diverse application needs.

RUBBER POT MAGNET-EXTERNAL THREAD

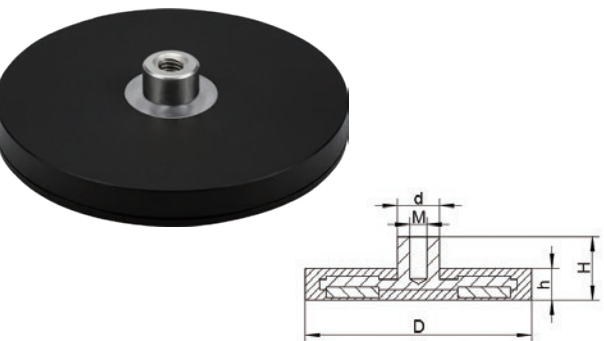


型号 Mode	D (mm)	M	d (mm)	h (mm)	H (mm)	重量 Weight (g)	吸力 Pull Force (kg)
RE22	22	4	8	6	12	12	4
RE27	27	5	8	9	15	35	10~11
RE31	31	4	8	6	16	28	8~9
RE43	43	5	12	6	16	36	11~12
RE50	50	6	12	10	18.5	115	25
RE66	66	6	12	8.5	18.5	98	20~22
RE88	88	8	12	8.5	18.5	210	40~42

RUBBER POT MAGNETIC WITH INTERNAL THREAD

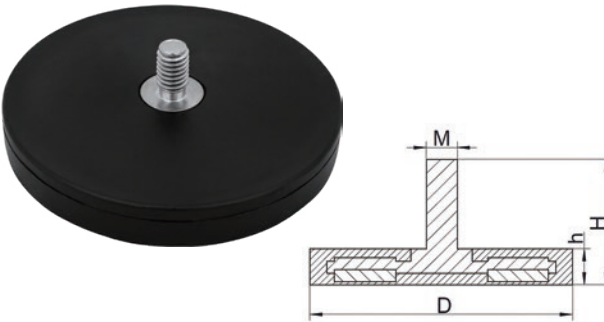

型号 Mode	D (mm)	M	d (mm)	h (mm)	H (mm)	重量 Weight (g)	吸力 Pull Force (kg)
RI22	22	4	8	6	12	12	4
RI27	27	5	8	9	15	35	10~11
RI31	31	4	8	6	16	28	8~9
RI43	43	5	12	6	16	36	11~12
RI50	50	6	12	10	18.5	115	25
RI66	66	6	12	8.5	18.5	98	20~22
RI88	88	8	12	8.5	18.5	210	40~42

RUBBER POT MAGNETIC WITH THREAD INSIDE

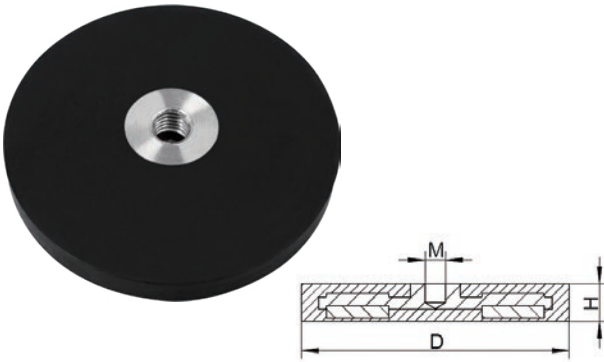

型号 Mode	D (mm)	M	d (mm)	h (mm)	H (mm)	重量 Weight (g)	吸力 Pull Force (kg)
RT22	22	4	8	6	12	12	4
RT27	27	5	8	9	15	35	10~11
RT31	31	4	8	6	16	28	8~9
RT43	43	5	12	6	16	36	11~12
RT50	50	6	12	10	18.5	115	25
RT66	66	6	12	8.5	18.5	98	20~22
RT88	88	8	12	8.5	18.5	210	40~42

RUBBER COATED MAGNETIC POT



型号 Mode	尺寸 Size(mm)	吸力 Pull Force(kg)	重量 Weight(g)
RF51	F51*32*H7-D4.5+9.5	19.7	50
RF75	F75*42*H6-2M8	30	91



型号 Mode	尺寸 Size(mm)	重量 Weight(g)
RC6302	D22*H25*H8	23.5



型号 Mode	尺寸 Size(mm)	重量 Weight(g)
RC6303	D25*5	6.5
RC6304	D23*4	8
RC6305	D16*9	9
RC6306	D16*4	4
RC6307	D19*4	4
RC6308	D18*5	5.4

CUSTOMIZATION



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌



ANCHOR MAGNET

Exceptional holding force up to 1000 kg.Lever-assisted mechanism enables easy,safe installation and release. Lightweight,stable and safe for heavy-duty anchoring. Applications: industrial fixing, heavy equipment installation, temporary fixing, steel construction, marine engineering.



PRODUCT FEATURES

- Strong Anchoring Force
- Easy Release Operation
- Lightweight Design

APPLICATION AREAS

- Industrial Fixing Operations
- Heavy Equipment Installation
- Temporary Fixing Solutions

ADVANTAGE COMPARISON

Our Anchor Magnet	Traditional Anchors
Hands-Free Operation Extended Service Life	Requires Manual Adjustment Easy to Wear Out



TECHNICAL SPECIFICATIONS

Mode	ZY-1
Material	High-Strength Steel
Product Size	F145*80*20mm
Tension	125 (B) ~ 155 (A) kg
Hanging Rings	M10
Weight	935g

ANCHOR MAGNET

Hold Fast, Built to Last

PRODUCT FEATURES

- Safety Ring Design
- Safe Operation Mechanism
- Impact Prevention

APPLICATION AREAS

- Steel Construction
- Heavy Equipment Installation
- Safety-Critical Operations
- Professional Anchoring

ADVANTAGE COMPARISON

Our Anchor Magnet	Traditional Anchors
Safety Ring Protection Impact Prevention	No Safety Features Uncontrolled Release



TECHNICAL SPECIFICATIONS

Mode	ZY-2
Material	Industrial Grade Steel
Product Size	F250*110*H73mm
Tension	330 (B) ~ 350 (A) kg
Hanging Rings	M12
Weight	1835g

PRODUCT FEATURES

- 1.1 Ton Magnetic Force
- Heavy-Duty Anchoring
- Professional Release Mechanism

APPLICATION AREAS

- Heavy Steel Construction
- Marine Engineering
- Industrial Manufacturing
- Heavy Equipment installation

ADVANTAGE COMPARISON

Our Anchor Magnet	Traditional Anchors
1.1T Anchor Magnet Magnetic Attachment	Limited Strength Mechanical Fixing



TECHNICAL SPECIFICATIONS

Mode	ZY-3
Material	Industrial Grade Steel
Product Size	D180*F280*H160-H28mm
Tension	1000~1100kg
Hanging Rings	M18
Weight	9.4kg



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌



MAGNETIC TOOL

MAGNETIC BOWL

Magnetic Bowl: Portable, strong magnetism to hold small parts; prevents loss; for work-shop, garage, field work.



型号 Mode	尺寸/Size	重量Weight(g)
RC7202-1	6inch	295



型号 Mode	尺寸/Size	重量Weight(g)
RC7202-3	3inch	84
RC7202-4	4inch	179
RC7202-6	6inch	343




型号 Mode	尺寸/Size	重量Weight(g)
RC7203-1	F148*65*H23	168
RC7203-2	F237*137*H46	675



Use it horizontally



Use it upside-down

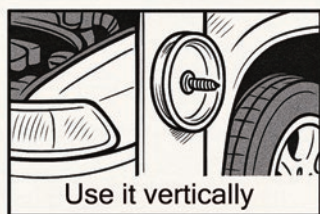

Use it vertically



Small parts will never be lost

MAGNETIC KNIFE HOLDER

Magnetic Knife Holder: Powerful magnet; holds most tools; space-saving; easy installation.

See Your Tools, Grab in Seconds



型号 Mode	尺寸/Size(mm)	重量Weight(g)
KH01-300	F310*40*H20	275
KH01-400	F408*40*H20	410
KH01-500	F500*40*H20	500



型号 Mode	尺寸/Size(mm)	重量Weight(g)
KH04-200	F330*25*45	940



型号 Mode	尺寸/Size(mm)	重量Weight(g)
KH-06-8	F24.8*30*H28	295
KH-06-12	F350*30*H28	447
KH-06-13	F375*30*H28	515
KH-06-18	F500*30*H28	720
KH-06-24	F650*30*H28	900



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌



MAGNETIC WRISTBAND

Magnetic Wristband: Hands-free storage for screws, bolts and small parts; adjustable, comfortable.

PRODUCT FEATURES

- Strong Magnetic Attraction
- Hands-Free Operation
- Comfortable Wearing
- Adjustable Design

APPLICATION AREAS

- Construction Work
- Home Repair
- Automotive Maintenance
- DIY Projects

ADVANTAGE COMPARISON

Technical	Magnetic Wristband
Hands-Free Access	Requires Reaching



TECHNICAL SPECIFICATIONS

Mode	RC7101
Material	Nylon Strap + Magnetic Plate
Product Size	L58*W5.4*H1.8mm
Magnetic Strength	Strong Neodymium Magnets
Strap Length	Adjustable (One Size Fits All)
Weight(g)	125g



TECHNICAL SPECIFICATIONS

Mode	RC7102
Material	Nylon Strap+ Magnetic disc
Product Size	F37*9.5mm
Magnetic Strength	Strong Neodymium Magnets
Strap Length	Adjustable (One Size Fits All)
Weight(g)	65g

WELDING MAGNET

Welding Magnet: Heat-resistant up to 200°C; supports 45°/90°/135°; stable positioning; the welder's third hand.

PRODUCT FEATURES

- Strong Magnetic Adsorption
- Multi-Angle Support
- High-Temperature Resistance
- Precision Manufacturing

APPLICATION AREAS

- Steel Structure Welding
- Mechanical Manufacturing
- Equipment Maintenance
- Teaching and Training


ADVANTAGE COMPARISON

Magnetic Welding Clamp	Traditional Clamp
Hands-Free Operation	Requires Manual Adjustment



TECHNICAL SPECIFICATIONS

Mode	WM-1		
Material	Steel		
Applicable Workpiece Th	0.1" and above		
Angles	45° 90° 135°		
Magnetic Strength	25LBS	50LBS	75LBS
Weight(g)	294	508	889

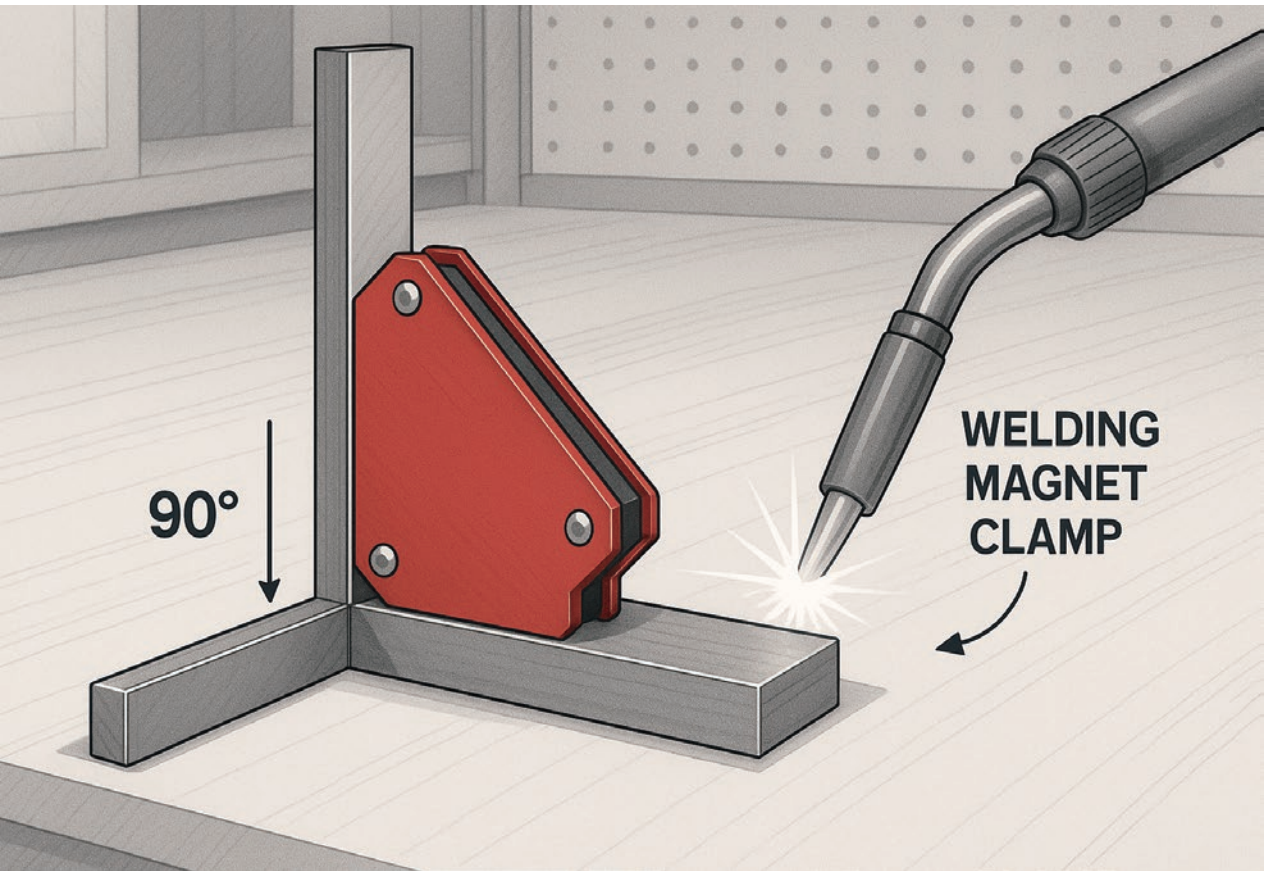

magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌



WELDING MAGNET

PRODUCT FEATURES

- High Temperature Resistance(200°C)
- Stable Welding Gun Support
- Lightweight Design
- Strong Magnetic Attraction

APPLICATION AREAS

- Steel Structure Welding
- Pipeline Welding
- Automotive Welding
- Shipbuilding
- Metal Fabrication
- Construction Welding



ADVANTAGE COMPARISON

Welding Magnet	Traditional Camps
Heat Resistant (200°C)	Temperature Sensitive
Lightweight	Heavy and Bulky

TECHNICAL SPECIFICATIONS

型号Mode	尺寸Inch Size(mm)	重量Weight(g)
WM-2	F350*81*H53	1040
WM-3	F500*81*H53	1130
WM-4	F750*81*H53	1235
Material	High-Strength Steel	
Temperature Resist	Up to 200°C	

The Welder's Third Hand

Heat-resistant up to 200°C; stable positioning; the welder's third hand

1 Place the magnetic fixture on the steel plate, ensuring the red magnetic suction cup firmly adheres to workpiece surface

2 Adjust the position of the fixture to ensure the guide rail aligns with the line to be focused

3 The focus worker wears protective gear and slowly moves the focus gun along the guide rail for focusing

4 After focusing is complete, a straight and uniform focus seam is obtained

WELDING MAGNET

PRODUCT FEATURES

- 20A Current Capacity
- Professional Grounding Function
- Strong Magnetic Base

APPLICATION AREAS


- Professional Welding
- Electrical Grounding
- Industrial Manufacturing
- Metal Fabrication
- Construction Welding
- Automotive Repair



TECHNICAL SPECIFICATIONS

Mode	WM-7
Material	Industrial Grade Steel + Copper
Product Size	D63*H50-128mm
Tension	25kg
Current Capacity	20A Maximum
Weight	270g

Magnetic Control, Productive Flow

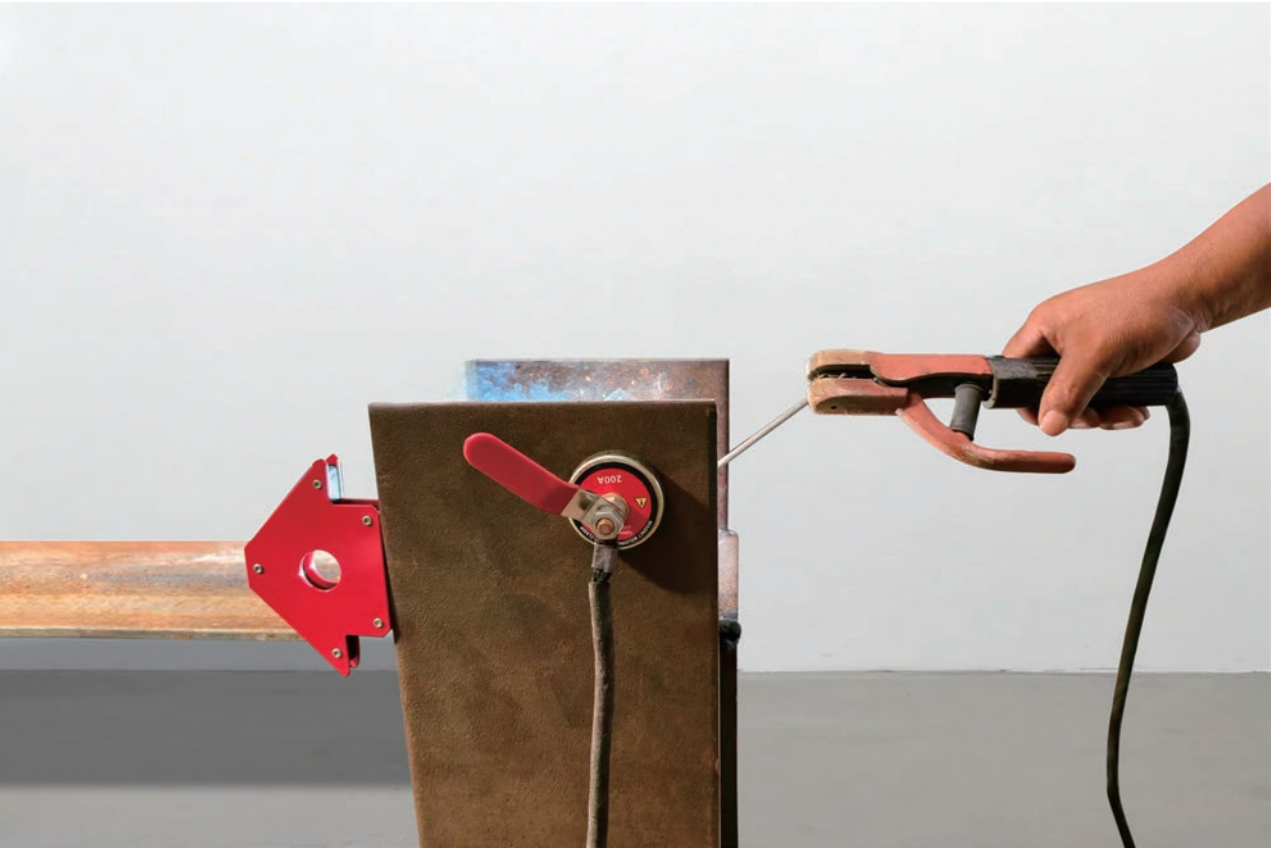

- magnet 各类磁铁
- pot magnet 各类磁吸盘
- fishing magnet 钓鱼/起重磁
- rectangular pot magnet 方形磁吸盘
- rubber coated magnet 包胶磁铁
- anchor magnet 锚固磁铁
- magnetic tool 磁性工具
- magnetic hook 磁性挂钩
- magnetic stationery 磁性文具
- magnetic name badge 磁性胸牌



MAGNETIC HOLDER

Magnetic Holder: Instant storage on metal surfaces; strong grip; space-saving.



型号 Mode	尺寸 Size(mm)	承量 Load-bearing(kg)	重量 Weight(g)
MC1-1	F105*110*H94	0.8	306
MC1-2	F205*110*H94	1.6	557
MC1-3	F305*110*H94	2.4	866



型号 Mode	尺寸 Size(mm)	承量 Load-bearing(kg)	重量 Weight(g)
MC2-1	F205*75*H94	1.6	610
MC2-2	F305*75*H94	2.4	803




型号 Mode	尺寸 Size(mm)	承量 Load-bearing(kg)	重量 Weight(g)
MC3-1	F101*100*H90	0.8	235
MC3-2	F200*100*H90	1.5	650
MC3-3	F300*100*H90	3	970



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
MC4	22*18*25	5.5

SCREWDRIVER MAGNET

Screwdriver Magnetizer: Turns any screwdriver into a magnetic one quickly.

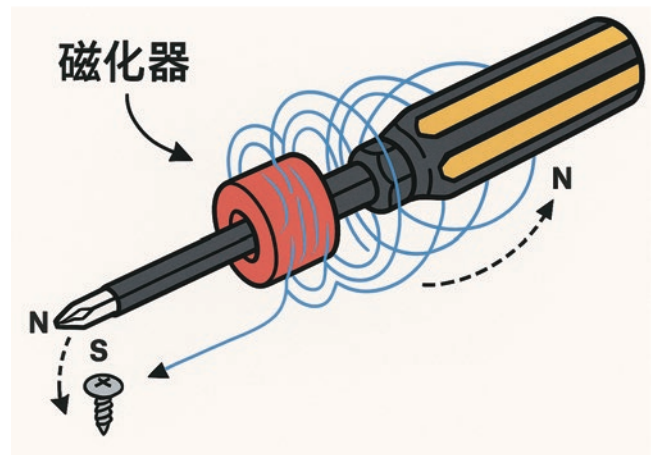

型号 Mode	尺寸 Size (mm)	重量 Weight(g)
RC7104	16*20*7	7.8



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌



MAGNETIC SWEEPER


Magnetic sweepers are super useful tools for cleaning up metal debris from all sorts of places. You'll see them being used on roads, in parks and gardens, and around industrial sites where metal scraps and fragments can be a real problem. They're basically lifesavers when it comes to keeping areas safe and clean.

We've got magnetic sweepers in all different sizes to match whatever job you're dealing with. Whether you're working in a tight garden space or covering a huge industrial yard, there's a size that'll work perfectly for your situation.


*Automate Your Safety,
Magnetize Your Efficiency*



型号 Mode	尺寸/Size	重量Weight(kg)
MS-1	18inch	7
MS-2	21inch	7
MS-3	24inch	7.5
MS-4	30inch	9
MS-5	36inch	10

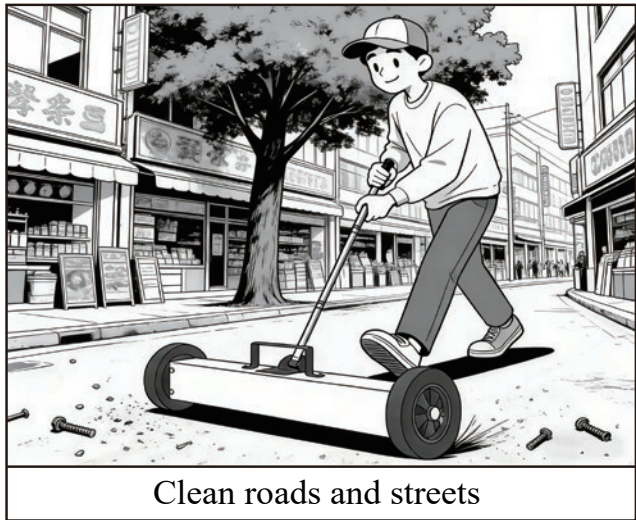

Clean roads and streets

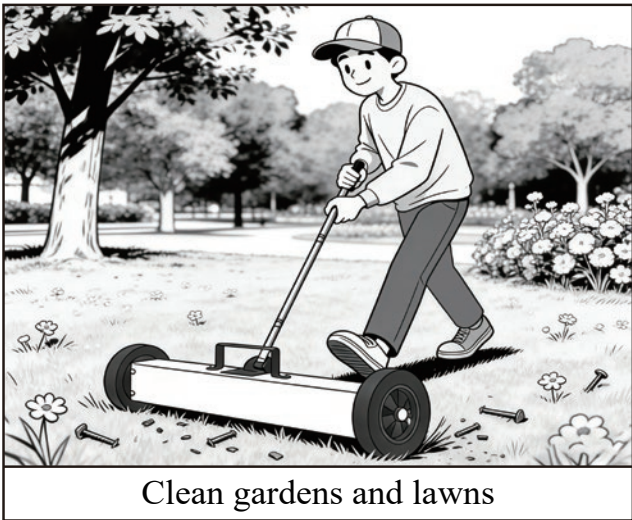

Clean gardens and lawns




型号 Mode	吸附部尺寸 Picker Area Dimension	手杆尺寸 (cm)	重量 Weight(kg)
MS-6	600*80*80	58.5~123	4.5



型号 Mode	吸附部尺寸 Picker Area Dimension	手杆尺寸 (cm)	重量 Weight(g)
SMS-1	350*40*40	42~111	960



Clean construction sites

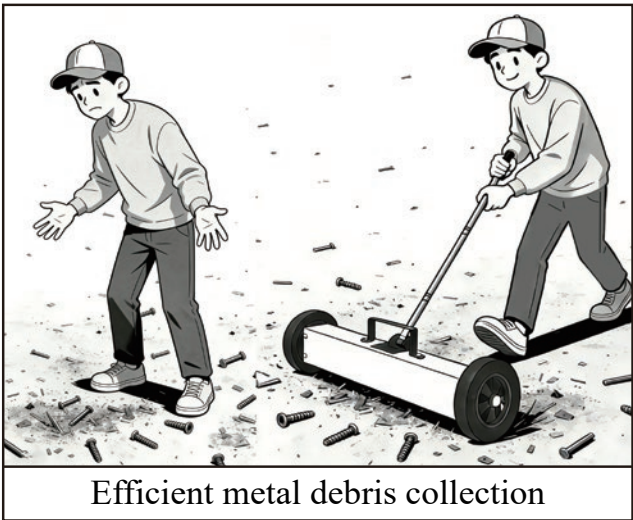

Efficient metal debris collection



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩


magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌



MAGNETIC PICKER (ROD TYPE)

Go Everywhere, Lift Everything

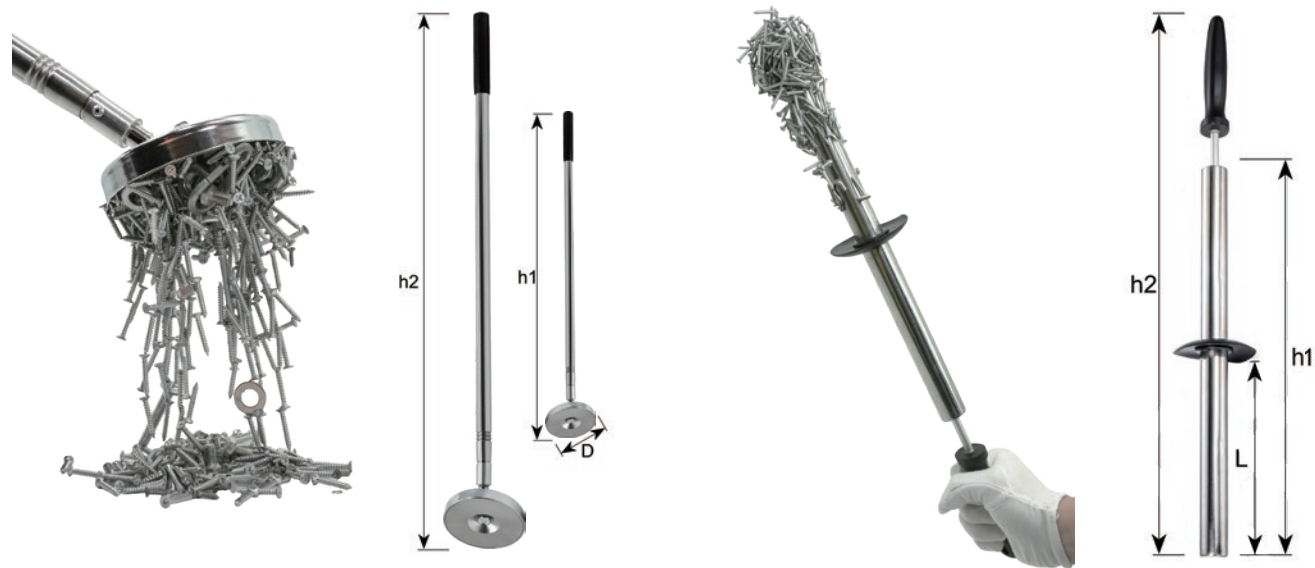

型号 Mode	D (mm)	h1 (mm)	h2 (mm)	重量 Weight (g)
MP-1	90	700	1200	625


型号 Mode	h1 (mm)	h2 (mm)	L (mm)	D (mm)	重量 Weight (g)
MP-2	350	500~720	130	25	570



型号 Mode	h1 (mm)	h2 (mm)	h3 (mm)	L (mm)	d (mm)	重量 Weight (g)
MP-3	350	390	600	130	25	500
MP-4	600	635	1060	180	25	600
MP-5	1000	1050	1800	235	25	1050

型号 Mode	L2 870~1030 mm			最高工作温度 Working Temperature (°C)	重量 Weight (g)
	D1	L	L1		
MP-6	87	200	600	<80	1650

MAGNETIC PICKER (ROD TYPE)

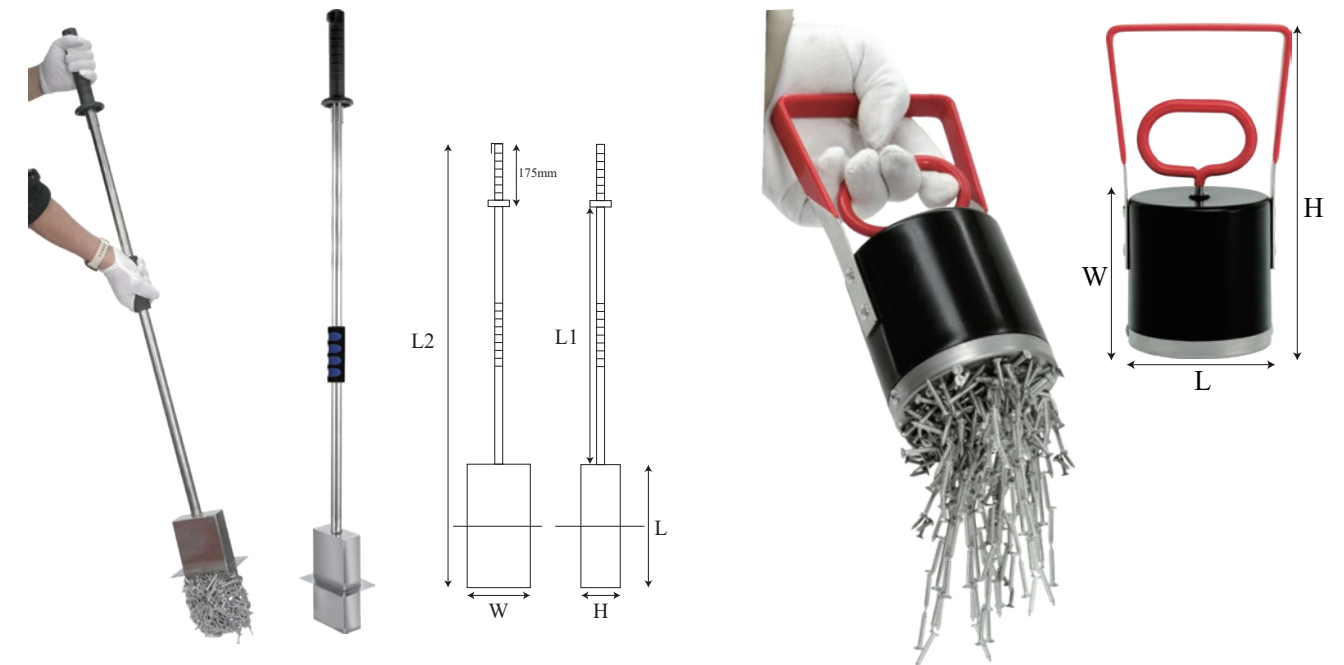

型号 Mode	L2 1215~1330 mm				最高工作温度 Working Temperature (°C)	重量 Weight (g)
	W	H	L	L1		
MP-7	95	45	200	840	<80	1800

型号 Mode	L (mm)	W (mm)	H (mm)	重量 Weight (g)
MP-9	85	92	190	310

PRODUCT FEATURES

- Powerful Magnetic Force (30-90kg)
- Quick Release Mechanism
- Ergonomic Handle Design
- Industrial Grade Construction

APPLICATION AREAS

- Manufacturing Operations
- Warehouse Management
- Metal Processing
- Construction Sites
- Automotive Industry
- Machinery Maintenance

ADVANTAGE COMPARISON

Welding Magnet	Traditional Clamps
Magnetic Picker Quick Release	Hands-Free Lifting Time-Consuming



TECHNICAL SPECIFICATIONS

Mode	MP-8
Material	Industrial Grade Steel
Product Size	D70(big size:D85)*H120mm
Tension	30~90kg
Surface Treatment	Anti-Corrosion Coating
Weight	750g(big size:945g)



magnet
各类磁铁



pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌



IRON DUST PICKER(CYLINDER TYPE)



型号 Mode	尺寸/Size(mm)		重量 Weight(g)
	D	H	
MP-10	117	220	1130



型号 Mode	尺寸/Size(mm)		重量 Weight(g)
	D	H	
MP-11	117	750	1130

IRON DUST PICKER(LENGTH ADJUSTABLE)



型号 Mode	尺寸/Size(mm)		重量 Weight(g)
	D	H	
MP-12	70	320~1030	280



型号 Mode	尺寸/Size(mm)		重量 Weight(g)
	D	H	
MP-13	70	1590~450	400

MAGNETIC PICKER

PRODUCT FEATURES

- 150kg Lifting Capacity
- Lightweight Design
- Smart Handle Release
- Strong Magnetic Base

APPLICATION AREAS

- Heavy Metal Processing
- Industrial Manufacturing
- Construction Sites
- Automotive industry
- Steel Processing

ADVANTAGE COMPARISON

150kg Magnetic Picker	Manual Tools
-----------------------	--------------



TECHNICAL SPECIFICATIONS

Mode	MP-14
Material	Industrial Grade Steel
Product Size	F140*110*H185mm
Tension	150kg
Base	Strong Maghetic Square Base
Weight	2.4kg



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌



MAGNETIC PICKER




型号 Mode	尺寸/Size(mm)	重量Weight(g)
MP-15	110*30*112	700



型号 Mode	尺寸/Size(mm)		重量Weight(g)
	D	H	
MMP-1	25	1135~235	105




型号 Mode	尺寸/Size	重量Weight(g)
MMP-2	D16	45
MMP-3	D14	42
MMP-4	D12	38

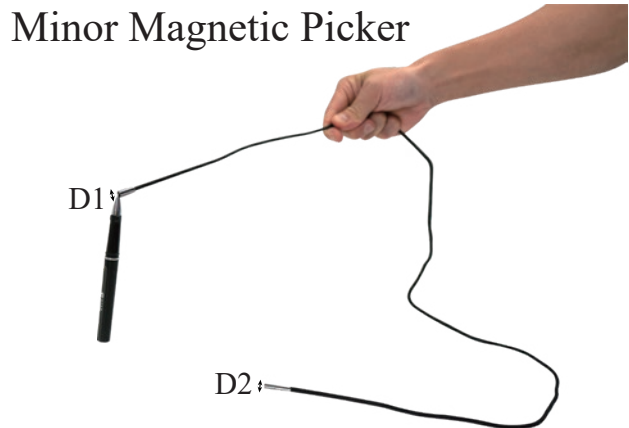

型号 Mode	尺寸/Size(mm)		长度可定制 (customizable length)
	D1	D2	
MMP-5	6	4	Default 500mm

MAGNETIC ROD & FILTER

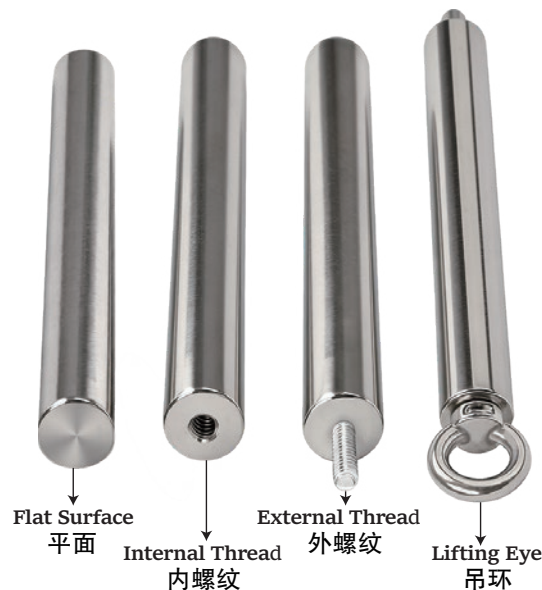

D (mm)	L (mm)	重量 Weight(g)
25	200	740
25	250	925
25	300	1110
25	400	1480
25	500	1850
32	300	1880
备注(Notice)		Br:13500~10000GS



MAGNETIC BASE

PRODUCT FEATURES



- Strong Magnetic Adsorption
- Magnetic Switch
- Multi-Dimensional Adjustment
- Precise Positioning
- Universal Compatibility

APPLICATION AREAS

- Mechanical Processing
- Laboratory Research
- Auto Repair
- Teaching and Training

ADVANTAGE COMPARISON

COMPARISON WITH TRADITIONAL BRACKETS	
Easy Adjustment	Require Clamping

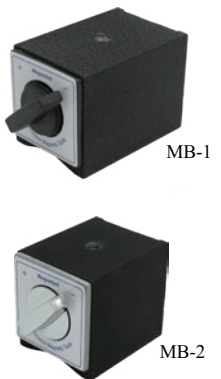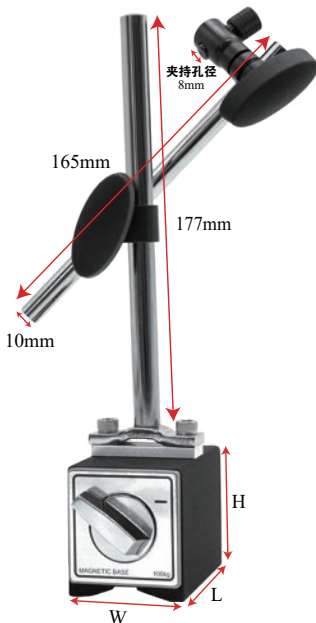

MB-1	MB-2
L76*W50*H55	L61*W50*H55
1595g	1368g

TECHNICAL SPECIFICATIONS

Mode	MB-1	MB-2
Magnetic Force	176 lbf	75 lbf
Adjustment Range	Multidimensional	
Applicable Instruments	Dial indicators, Lever-type indicators	



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具


magnetic
name badge
磁性胸牌



MAGNETIC HOOK

No drilling, no damage – instant hanging.Applications: Home Kitchen Bathroom Office Warehouse.


Swivel design Strong holding force Easy to remove & reuse

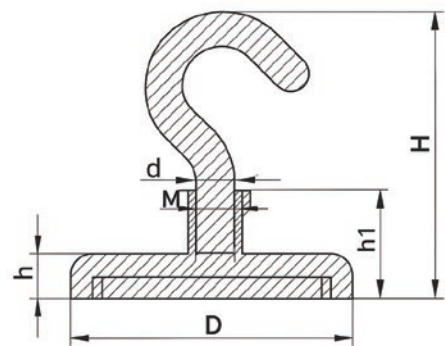

型号 Mode	D (mm)	M	H (mm)	h1 (mm)	h (mm)	重量 Weight (g)	吸力 Pull Force (kg)
E10	10	3	34.5	12	4.5	4.6	1~2
E12	12	3	34.5	12	4.5	5.5	2~3
E16	16	4	36	12.5	5	9.8	6~8
E20	20	4	38	15	7	19	11~15
E25	25	5	45	15	8	32	20~25
E32	32	6	48	18	8	48	35~40
E36	36	6	50	18	8	62	40~50
E42	42	6	50	20	9	88	60~75
E48	48	8	61	23	11.5	165	85~100
E60	60	8	66	30	15	282	120~150
E75	75	10	84	32	18	530	220~250
E90	90	10	90	35	18	920	280~360


ROTATING SERIES

Keep your space tidy and items easily accessible360° swivel design, compact size, strong holding forceSuitable for home, office, and industrial use.

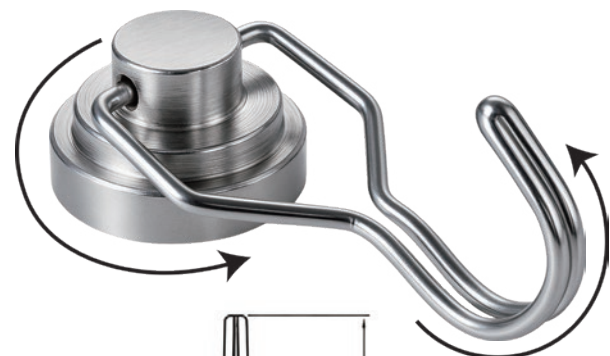


型号 Mode	D1 (mm)	D2 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	重量 Weight (g)	吸力 Pull Force (kg)
WXD-D13	13	7	6	10.4	34	8.5	2~3
WXD-D16	16	10.5	5	12	41	16	5~7
WXD-D20	20	10.5	6.5	13	62	19	11~13
WXD-D25	25	14	7	13	67	38	20~22
WXD-D32	32	15	7	13.5	67	52	30~34
WXD-D36	36	15	8	14	67	65	34~40
WXD-D42	42	15	5	14	67	84	50~60

ROTATING SERIES

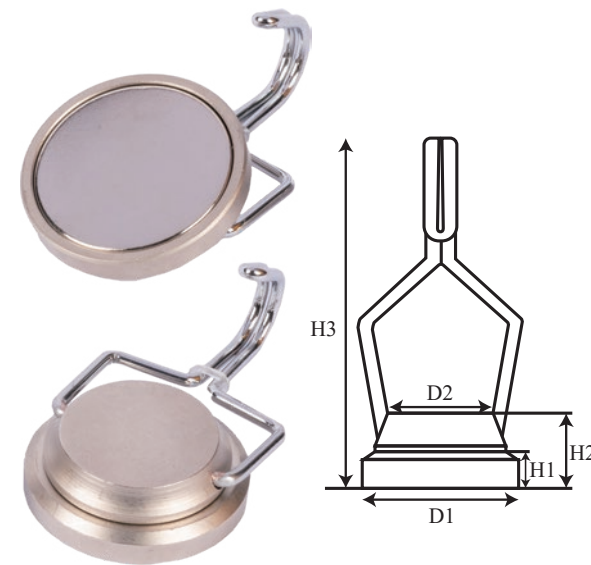

型号 Mode	D1 (mm)	D2 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	重量 Weight (g)	吸力 Pull Force (kg)
WXP-D16	16	7	7	12	37	13	5~7
WXP-D20	20	10.5	5.5	11	43	25.2	11~13
WXP-D25	25	15	6.2	11.2	60	38	20~23
WXP-D32	32	20	5.5	11	60	56	30~34
WXP-D36	36	24	5.5	11	60	65	34~40
WXP-D40	40	26	7.5	13.5	60	99	50~60

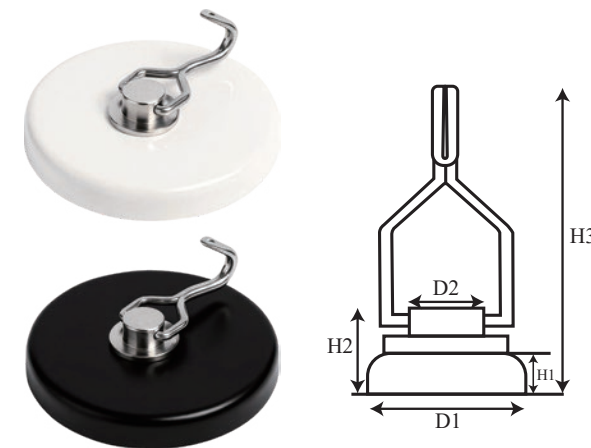

型号 Mode	D1 (mm)	D2 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	重量 Weight (g)	吸力 Pull Force (kg)
WXT-D57	57	14	11	20	70	180	20~25
WXT-D63	63	14	12	21	72	200	25~30
WXT-D80	80	14	17	26	72	300	50~60



型号 Mode	D (mm)	H (mm)	H1 (mm)	重量 Weight (g)	吸力 Pull Force (kg)
WXF-D19	19	10	45	30	10~13
WXF-D25	25	8	53	40	16~20

型号 Mode	D (mm)	H (mm)	吸力 Pull Force(kg)
RC6115	16	5	5~7
RC6116	20	7	11~13
RC6117	25	7	20~22



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具


magnetic hook
磁性挂钩

magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌



MAGNETIC HOOK

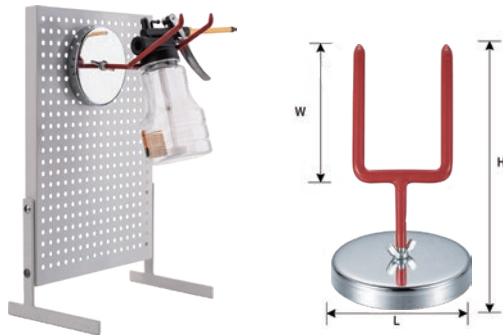

型号 Mode	L (mm)	W (mm)	H (mm)	重量 Weight(g)
RC7103	90	90	150	440



型号 Mode	尺寸 Size(mm)	重量 Weight(g)
TH-2	D126*H145	260



型号 Mode	尺寸 Size(mm)	重量 Weight(g)
TH-3	D140*H145	280



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	吸力 Pull Force(kg)
RC6103	F64*37*32.5	25	8



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	吸力 Pull Force(kg)
MH-4	D28*H5.5	43	25~30



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	吸力 Pull Force(kg)
MH-5	L60*W40*H25	54	1.5~2.5

MAGNETIC HOOK



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	吸力 Pull Force(kg)
RC6112	D25*H7+H17.5-D5.5	42	18~22
RC6113	D32*H7+H17.5-D5.5	47	30~34
RC6114	D36*H8+H18.5-D5.5	52	34~40



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	吸力 Pull Force(kg)
MH-1	D43*H31-D6	79	7~9



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	吸力 Pull Force(kg)
MH-2 (Ferrite)	53*27*11	50	13~16
MH-3 (NdFeB)	53*27*11	55	18~22



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	吸力 Pull Force(kg)
MH-6	D11*H12*H27	11	1.5~2.5



Camping Magnet			
型号 Mode	尺寸 Size(mm)	重量 Weight(g)	吸力 Pull Force(kg)
MH-7	D14/D8/H18/L70 (带吊环长度)	23.5	3~5



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	吸力 Pull Force(kg)
RC6119	D16*H18	3.2	0.25



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌



MAGNETIC STATIONERY

Strong, stylish magnets for whiteboards, fridges, offices.
Applications: Notes、Photos、Documents、Posters、School、Home、Office.

MAGNETIC CLIP



型号 Mode	尺寸/Size(mm)	重量Weight(g)
RC8501	60*60*28	27



型号 Mode	尺寸/Size(mm)	重量Weight(g)
RC8502	72*51*39	56



型号 Mode	尺寸/Size(mm)	重量Weight(g)
RC8505	85*30*38	38



型号 Mode	尺寸/Size(mm)	重量Weight(g)
RC8506	70*70*22	42



型号 Mode	尺寸/Size(mm)	重量Weight(g)
RC8515	65*62*33	30




型号 Mode	尺寸/Size(mm)	重量Weight(g)
RC8516	75*56*35	35

FERRITE PUSH PIN


Cost-effective and durable ferrite stationery magnets are widely used in offices, schools and households. Made of high-performance Y30 ferrite material, they provide stable magnetic force, excellent durability and eco-friendly non-toxic properties, ensuring safe usage and long service life. These magnets deliver reliable holding force for light to medium daily applications, ideal for securely attaching notes, documents, photos, posters and reminders on whiteboards, refrigerators, bulletin boards and other metal surfaces. Suitable for office organization, educational purposes, daily storage and various DIY creative projects.



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
STD-D15	D15*H7	1.5	hold 3 piece of paper
STD-D19	D19*H6.3	3.2	hold 7 piece of paper
STD-D26	D26*H8	5	hold 12 piece of paper
STD-D31	D31*H8	14	hold 15 piece of paper

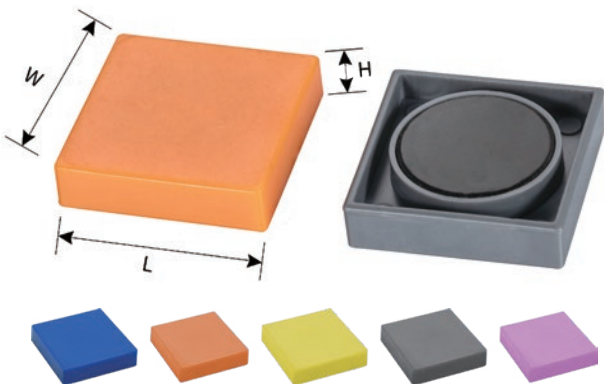

型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
RC5211	L35*W35*H9	18	hold 14 piece of paper

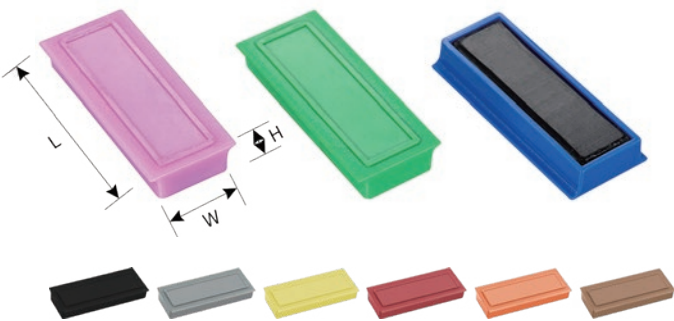

型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
RC5212	L55*W22.5*H8.5	22	hold 15 piece of paper
RC5213	L53*W23*H9	23	hold 15 piece of paper



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具


magnetic
name badge
磁性胸牌



MAP PIN



NDFEB PUSH PIN

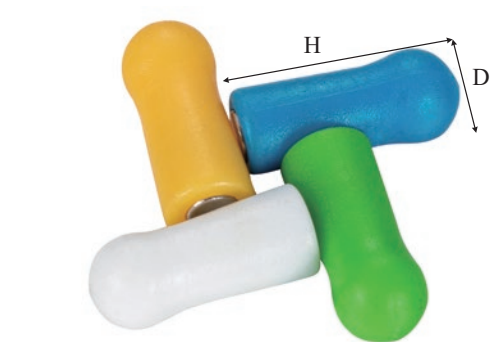


型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
SYD5-H8	D5*H8	0.4	hold 5 pieces of paper

型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
SZD-12	D12*H20	2	hold 12 piece of paper

型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
SXD11-17	D11*H17.6	1.5	hold 10 pieces of paper
SXD15-21	D15*H21	3	hold 12 pieces of paper
SXD21-25	D21*H25.4	7	hold 18 pieces of paper
SXD28-33	D28*H33	16	hold 25 pieces of paper

型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
SYD12-20	D12*H19	2	hold 12 pieces of paper
SYD19-25	D19*H25	6	hold 25 pieces of paper
SYD28.6-38	D29*H37.5	20.6	hold 35 pieces of paper


NDFEB PUSH PIN

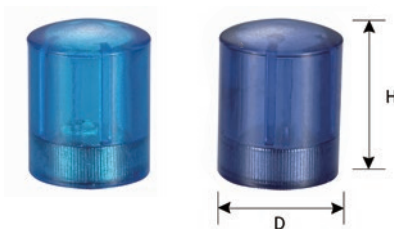


型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
SL14	D14*H18	4.3	hold 22 piece of paper




型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
RC5201	D10*H9	1.2	hold 10 piece of paper
RC5202	D18*H8	3.4	hold 22 piece of paper

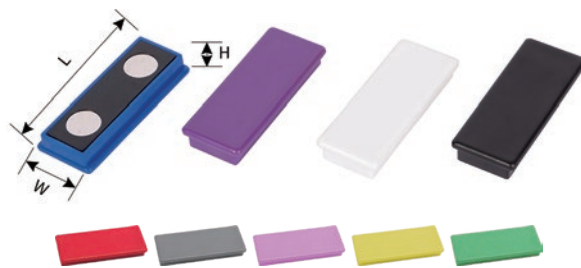

型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
RC5204	L55*W22.5*H8.5	14.8	hold 40 pieces of paper

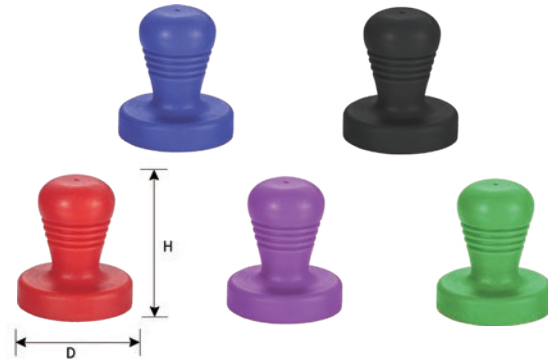

型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
SN21	D21*H24	12	hold 40 pieces of paper

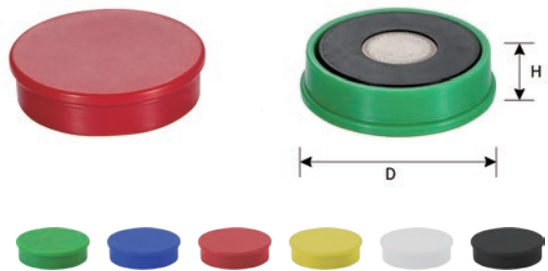

型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
RC5203	D30*H8	8	hold 25 pieces of paper



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
RC5205	D13*H30	4.8	hold 30 pieces of paper



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌



NDFEB PUSH PIN



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
RC5206	D17*H22	6.3	hold 20 piece of paper




型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
RC5209	D16*H16 不闭合(ring)	3.8	1.4kg
RC5210	D16*H16 闭合(hook)	3.8	1.4kg



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
RC5207	D22*H17	7.3	hold 30 piece of paper

Transparent cube (with the magnet inside)
Can adsorb in any direction!

型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
RC5208	F16.5*16.5*H16.5	3.8	hold 10 piece of paper

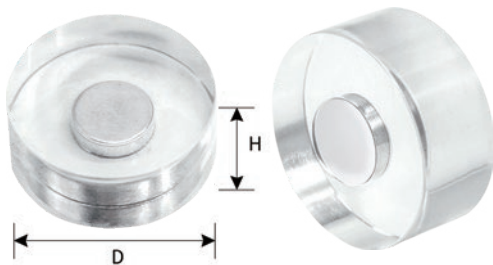

型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
TSM-20	D20*H12	4.5	hold 15 piece of paper
TSM-25	D25*H12	5.7	hold 18 piece of paper
TSM-30	D30*H12	8.2	hold 20 piece of paper

型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
TXD-D12	D12*H16	8	hold 18 pieces fo paper
TXD-D15	D15*H21	10	hold 28 pieces fo paper

NDFEB PUSH PIN



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index	
			NdFeb	Ferrite
AYD28	D28*H35	85	20kg	8kg
AYD32	D32*H42	100	32kg	10kg
AYD36	D36*H45	140	40kg	12.5kg
AYD42	D42*H50	220	60kg	15kg



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
RC5301	D11*H15	9	hold 20 piece of paper



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
RC5302	D11*H15	4	hold 15 piece of paper



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
RC5303	D11*H19	5	hold 20 piece of paper



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
RC5304	D28*H30	70	hold 30 piece of paper



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
RC5305	D32*H43	106	hold 32 piece of paper



型号 Mode	尺寸 Size(mm)	重量 Weight(g)	Tension Index
RC5306	D36*H40	110	hold 35 piece of paper



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌



MAGNETIC NAME BADGE

Premium, stylish and durable. Lightweight and comfortable for all-day wear. Strong magnetic back attaches securely to clothing without pins or damage. Suitable for all fabrics, from delicate shirts to uniforms.

For: Companies、Events、Hotels、Hospitals、Schools、Retail.

Caution: don't use for a pacemaker !



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
SC-01	45*13	10.2



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
SC-02	45*13	10.2



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
SC-03	33*13	8



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
SC-04	45*13	10.9



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
SC-05	45*13	9.2



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
SC-06	47*15	13.7

MAGNETIC NAME BADGE



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
SC-07	45*13	9.8



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
SC-08	45*13	10.2



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
SC-09	45*13	10.2



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
SC-10	45*13	11.2



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
SC-12	47*15	11.8



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
SC-19	80*12	7.1



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具


magnetic
name badge
磁性胸牌



MAGNETIC NAME BADGE



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
SC-15	61*16	16.9

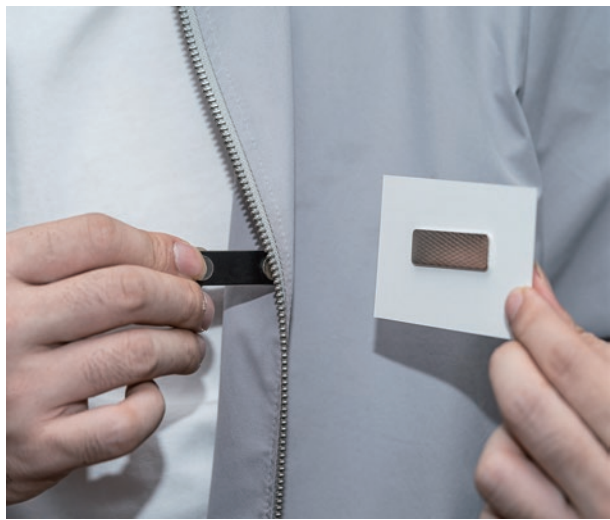

型号 Mode	尺寸 Size (mm)	重量 Weight(g)
SC-21	47*15	11.5



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
SC-22	55*15	12.5



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
TC-01	45*13	11.7



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
TC-02	D20	6.1

MAGNETIC NAME BADGE



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
TC-03	60*14	16.9



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
TC-04	37*13	12



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
TC-05	D17	4.8



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
TC-06	30*13	8



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
TC-08	70*15	20.4



型号 Mode	尺寸 Size (mm)	重量 Weight(g)
TC-09	90*20	37



magnet
各类磁铁

pot magnet
各类磁吸盘

fishing magnet
钓鱼/起重磁

rectangular
pot magnet
方形磁吸盘

rubber coated
magnet
包胶磁铁

anchor magnet
锚固磁铁

magnetic tool
磁性工具

magnetic hook
磁性挂钩

magnetic
stationery
磁性文具

magnetic
name badge
磁性胸牌